



# CRAZY CART CHAIN TENSIONER INSTALLATION INSTRUCTIONS

W25143499079

## Tools Required: (Not included)

- A. Phillips screwdriver
- B. Two (2) 10 mm wrenches

## ⚠WARNING

**⚠CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before removing or installing the chain tensioner. Failure to follow these steps in the correct order may cause irreparable damage.

## Step 1

Using a Phillips screwdriver, loosen the eight (8) screws on the motor cover, four (4) on each side, and remove cover.

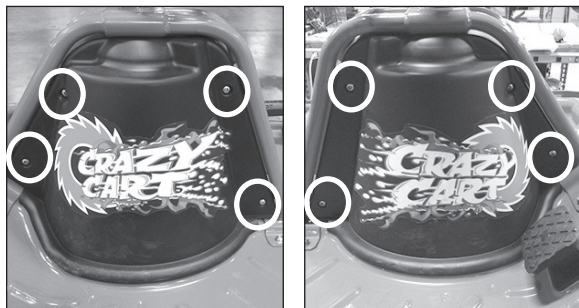


Figure 1

## Step 2

Loosen the three (3) Phillips screws on the chain guard and remove.

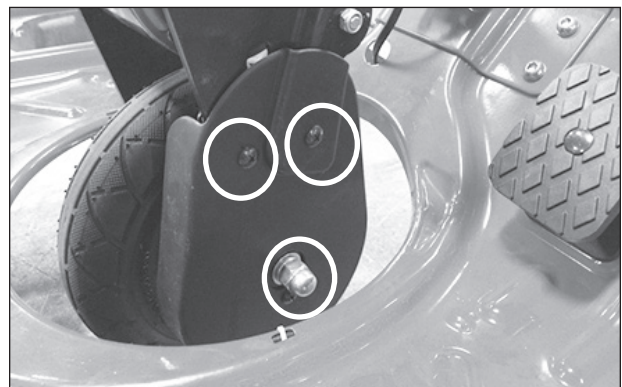


Figure 2

**Need Help?** Visit our website at [www.razor.com](http://www.razor.com) or call toll-free at **866-467-2967** Monday - Friday 8:00 AM - 5:00 PM PST.

### Step 3

Using two (2) 10 mm wrenches, loosen the locknut that secures the tensioner on to the fork and remove.

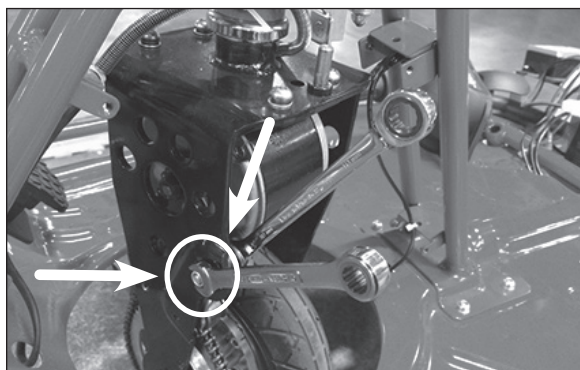


Figure 3

### Note

Make sure the roller is on the outer side of the chain putting pressure against the chain.

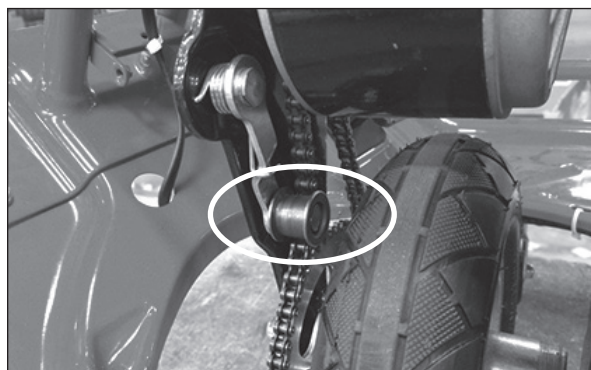


Figure 4

### Step 4

Reverse steps 1 through 3 to install replacement tensioner.

**ATTENTION: Charge battery 12 hours before initial use.**