



# CRAZY CART FRONT WHEEL/CHAIN INSTALLATION INSTRUCTIONS

W25143499049  
W25143499012

- Tools Required:** (Not included)
- A. Phillips screwdriver
  - B. Two (2) 16 mm wrenches

## ⚠WARNING

**⚠CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before removing or installing the front wheel/chain. Failure to follow these steps in the correct order may cause irreparable damage.

## Step 1

Using a Phillips screwdriver, loosen the eight (8) screws on the motor cover, four (4) on each side, and remove.



Figure 1

## Step 2

Loosen the three (3) Phillips screws on the chain guard and remove.

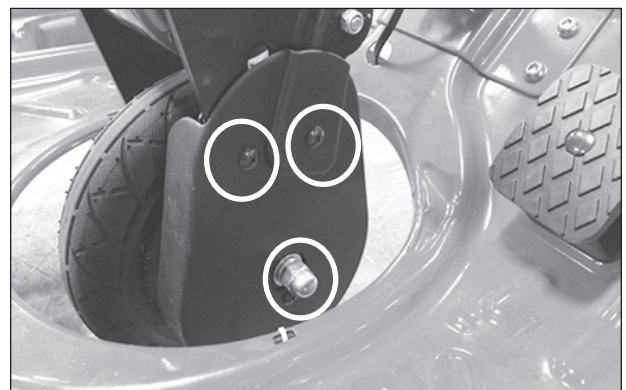


Figure 2

**Need Help?** Visit our website at [www.razor.com](http://www.razor.com) or call toll-free at **866-467-2967** Monday - Friday 8:00 AM - 5:00 PM PST.

### Step 3

Carefully turn the unit over and using two (2) 16 mm wrenches, remove both locknuts on the front axle bolt (Figure 3a) then remove the axle bolt (Figure 3b).




Figure 3a




Figure 3b

### Step 4

Carefully remove the chain from around the wheel sprocket (Figure 4a) and remove wheel from the front fork. If replacing the chain, also remove the chain from around the motor shaft (Figure 4b). Install replacement wheel/chain.




Figure 4a




Figure 4b

### Step 5

Reverse steps 1 through 4 to install replacement wheel/chain.  
Refer to pg. 6 in the Owner's Manual for front wheel hardware sequence

**ATTENTION: Charge battery 12 hours before initial use.**