



Dirt Quad 500 Motor Replacement Procedures




(1) Being very careful lift and rest the unit on the back wheels.

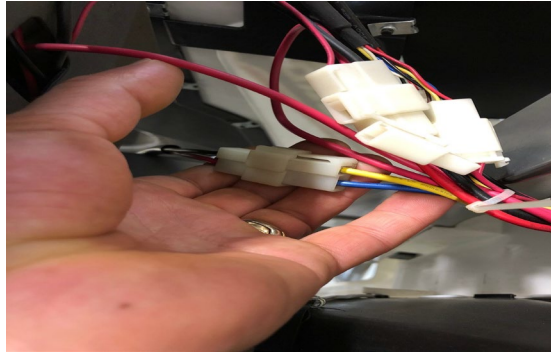

(2) Locate and disconnect the motor from controller.

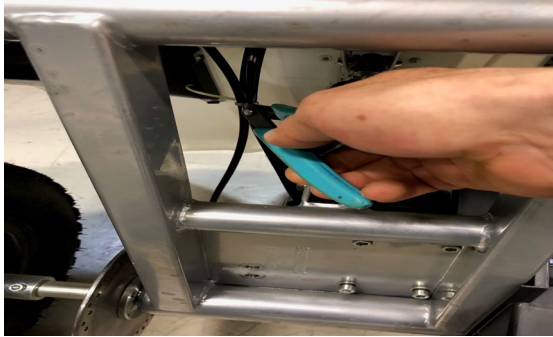

(3) Cut the zip tie that holds the motor wire to the brake cable.

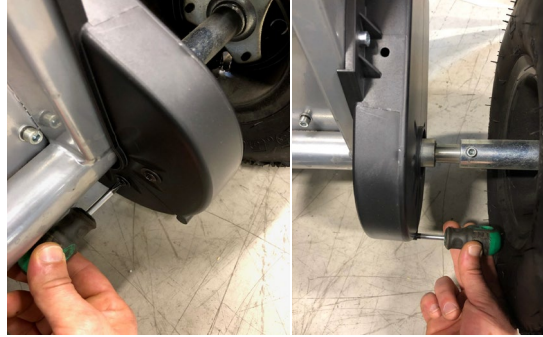

(4) Using a Phillips screw driver remove two screws located on the bottom inner side of the chain guard, remove one more screw to allow the chain guard to be split in half.



(5) Using a 5mm Allen wrench loosen up and remove the hex bolt that holds the chain guard to the frame, split the chain guard in half and remove.



(6) Using a 5mm Allen wrench loosen up and remove 4 hex bolts that secure the motor to the frame, tilt the motor to the side and remove the chain off from the motor sprocket.

Reverse the procedures

Attention: Charge battery 12 hours before using