


MX500/650/DQ Brake Caliper Pads Replacement Procedures



(1) Using a 5mm Allen wrench remove the two hex bolts shown on the picture



(2) Lift and remove the block that keeps the brake pads in place

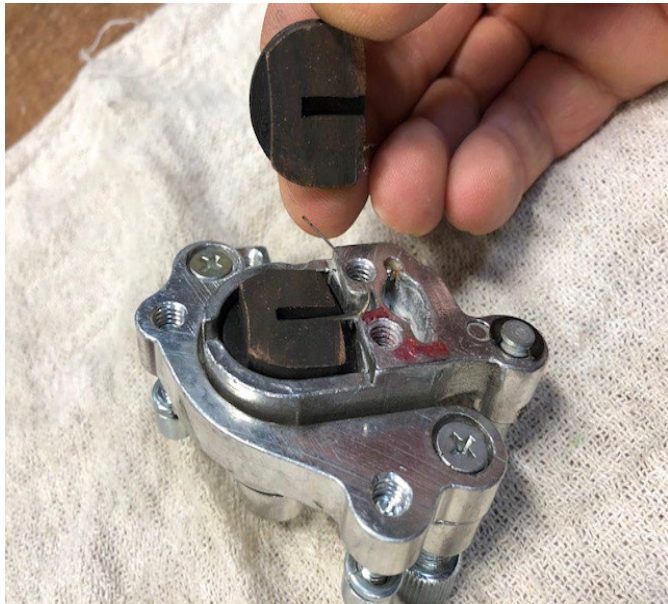

(3) Remove the pad from the block



(4) remove the clip (spring) from between the pads

Reverse the procedures

Attention: Charge battery 12 hours before using