



DIRT QUAD POWER SWITCH INSTALLATION INSTRUCTIONS

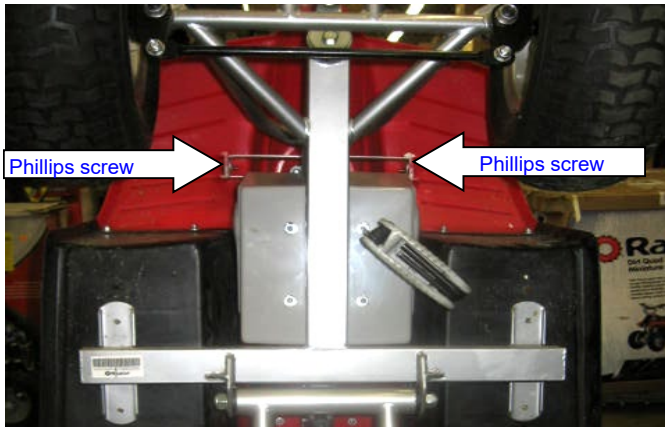


- 1) Make sure power switch is in the "OFF" position. Use the front carry handle to carefully lift Dirt Quad up on end. Using a Phillips screw driver, remove 2 screws on the support bracket. Using the front carry handle, slowly lower the Dirt Quad back down to the ground

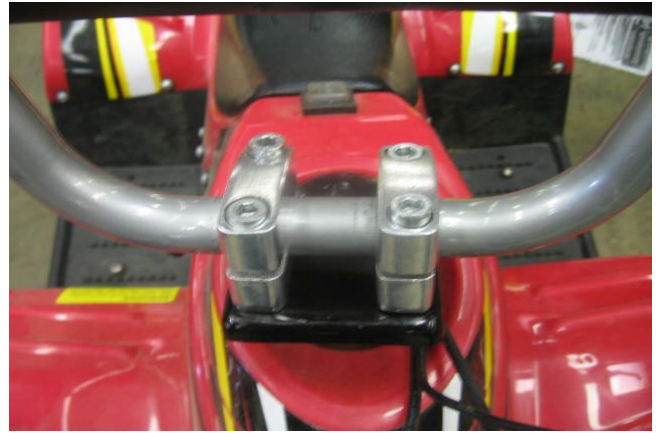

- 2) Using a 6mm Allen wrench, remove the 4 bolts on the handlebar clamps and detach handlebars




- 3) Using a 5mm Allen wrench, remove the 4 bolts on both sides of the footrest platforms

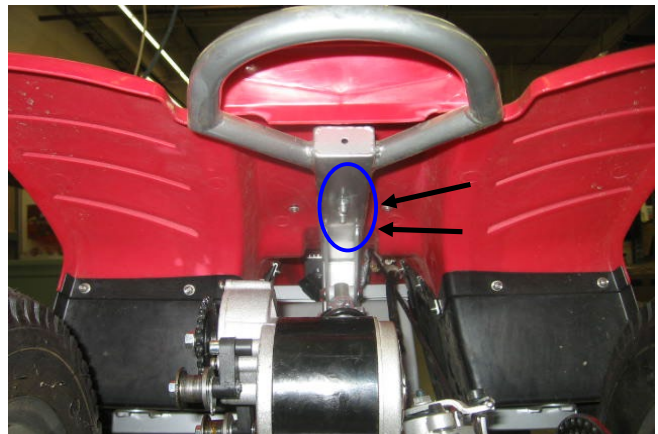


- 4) Using a size 10mm wrench, remove two lock nuts underneath the rear fender


DIRT QUAD POWER SWITCH INSTALLATION INSTRUCTIONS

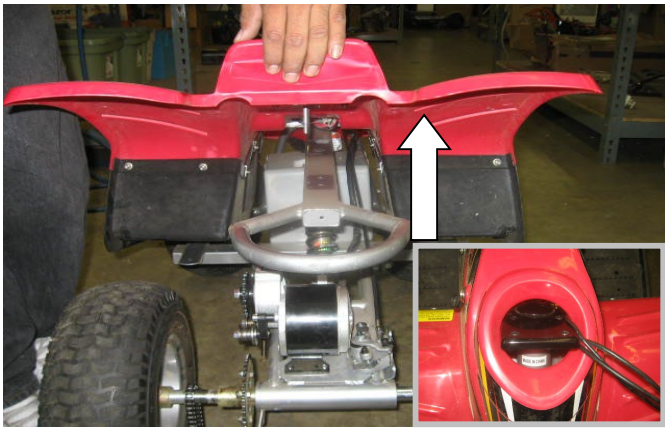

5) Lift up the plastic body. Carefully maneuver the front of the body plastic around the top of the steering tube (See insert)

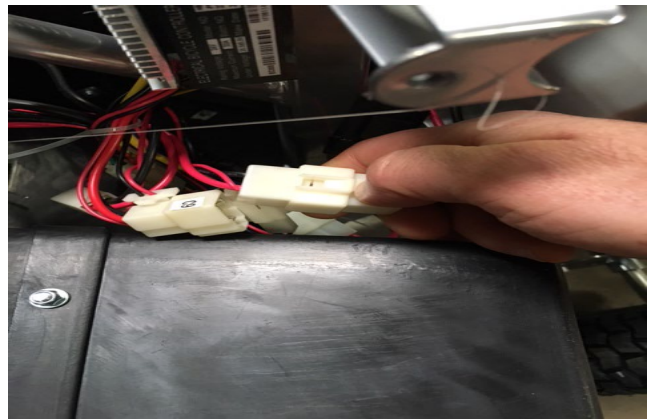

6) Disconnect the wire harness from the power switch to the controller and batteries also disconnect the charger port connector from controller.

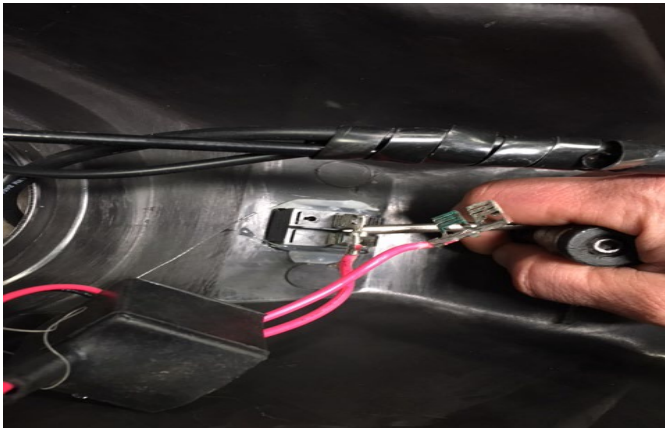

7) Remove the plastic cover from the back of the power switch and using a flat screw driver remove the wires and silicone from around the power switch.



8) De-press the locking tabs from the power switch and push out switch from body fairing.

Reverse Installation Steps