

Required Tools: (Not included)


- Phillips Screwdriver
- 5 mm Allen Wrench
- Cutting Pliers

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Carefully lift and rest the unit on the back wheels.

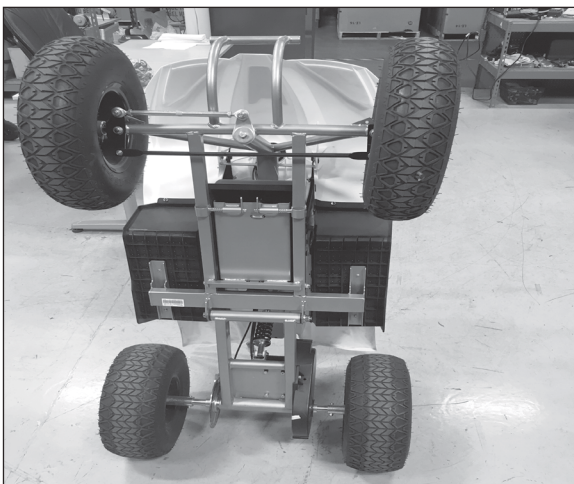
**Step 2**

Locate and disconnect the motor from the controller.

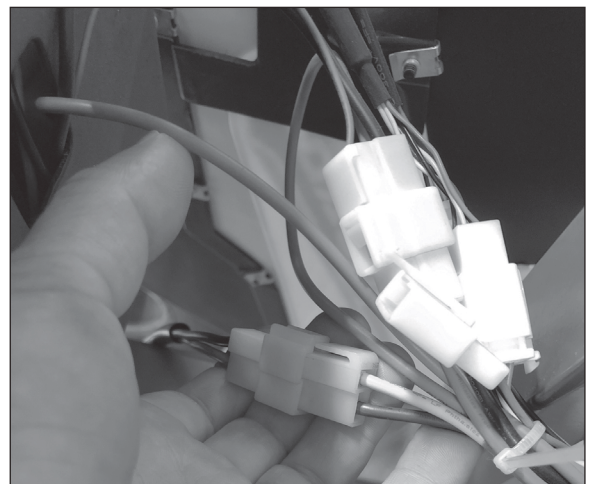


Step 3

Using cutting pliers, cut the zip tie that holds the motor wire to the brake cable.

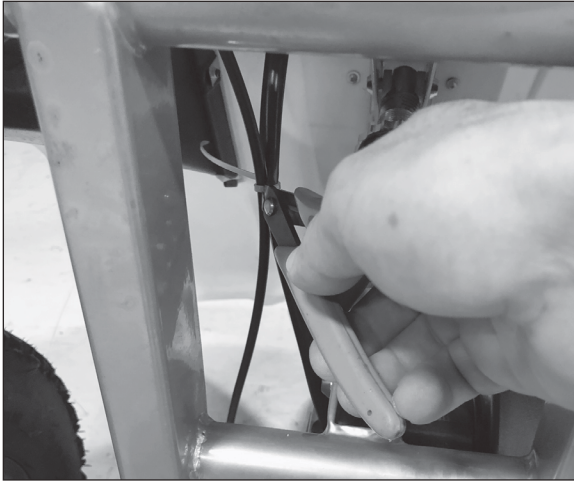


Step 4

Using a Phillips screwdriver, remove the two (2) screws located on the bottom inner side of the chain guard. Remove one more screw to separate the chain guard.

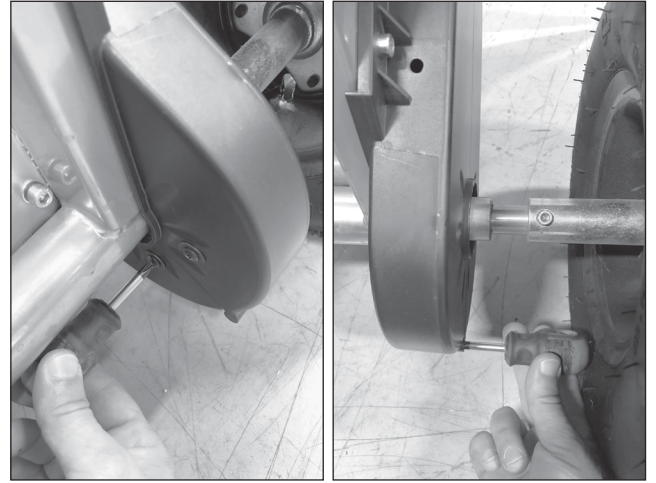


Step 5

Using a 5 mm Allen wrench, loosen and remove the hex bolt that holds the chain guard to the frame. Separate and remove the chain guard. Set the (2) two pieces of the chain guard aside.

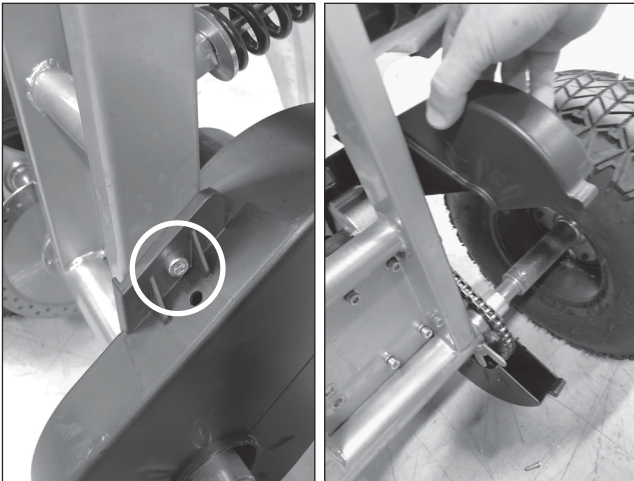

Step 6

Using a 5 mm Allen wrench, loosen and remove the (4) hex bolts that secure the motor to the frame. Tilt the motor to the side to remove the chain from the motor sprocket. Remove the motor.

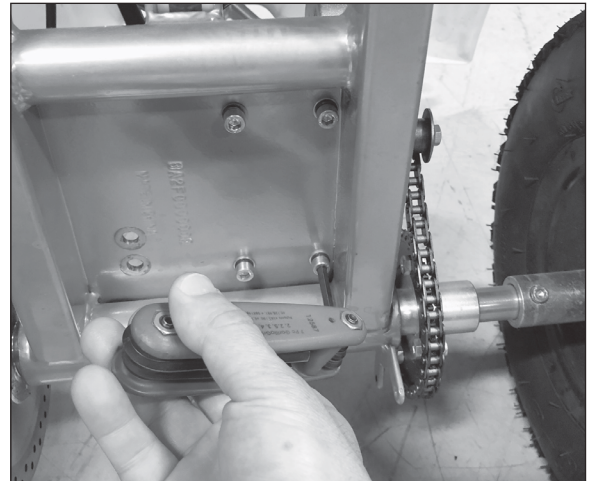

Step 7

To install a new motor, reverse steps 1 through 6.

ATTENTION: Charge battery 12 hours before using.