

Required Tools: (Not included)


- 3 mm Allen Wrench
- 4 mm Allen Wrench
- 5 mm Allen Wrench
- 6 mm Allen Wrench
- 10 mm Open Wrench
- Phillips Screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Use the rear carry handle to carefully lift the Dirt Quad up on its front end. Using a 5 mm Allen wrench, remove the four (4) bolts on the bottom of the battery cover. Using a 3 mm Allen wrench, remove the two (2) bolts on the support bracket. Using the rear carry handle, slowly lower the Dirt Quad back down to the ground. Save bolts for reassembly.

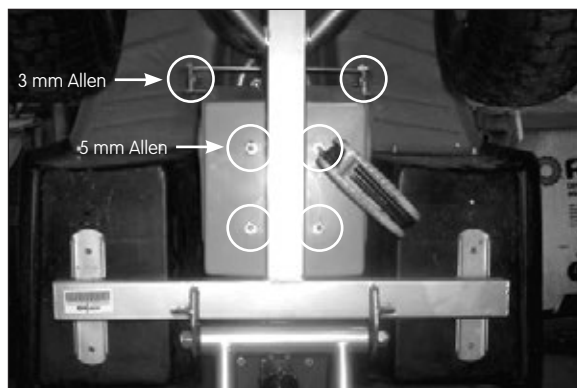**Step 2**

Using a 6 mm Allen wrench, remove the four (4) bolts on the handlebar clamps and detach handlebars.

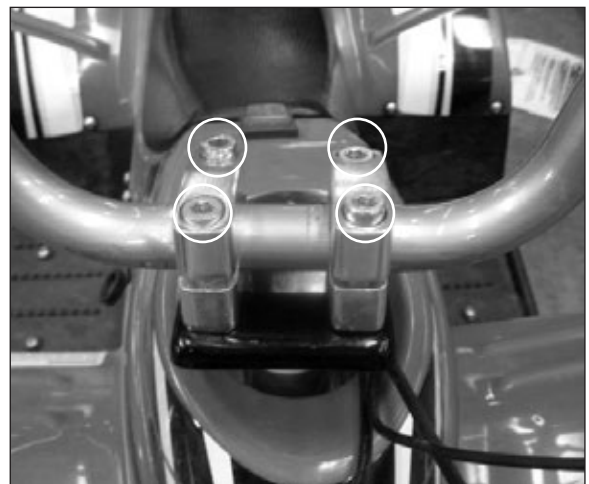


Step 3

Using a 5 mm Allen wrench, remove the four (4) bolts on both sides of the footrest platforms.




Step 4

Using a 10 mm open wrench, remove the two (2) lock nuts underneath the rear fender.

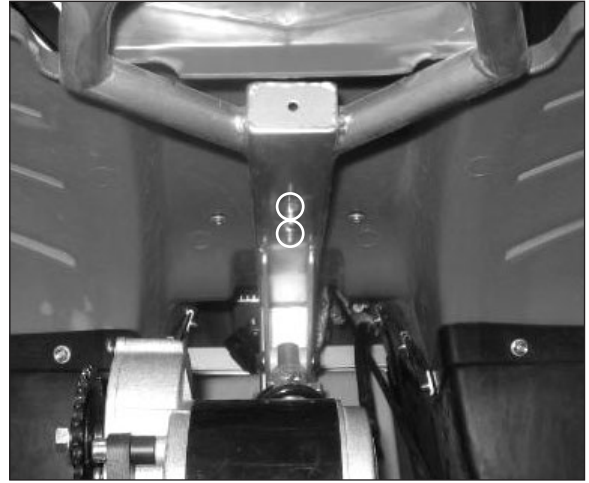


Step 5

Lift up the plastic body and carefully maneuver it around the top of the steering tube.

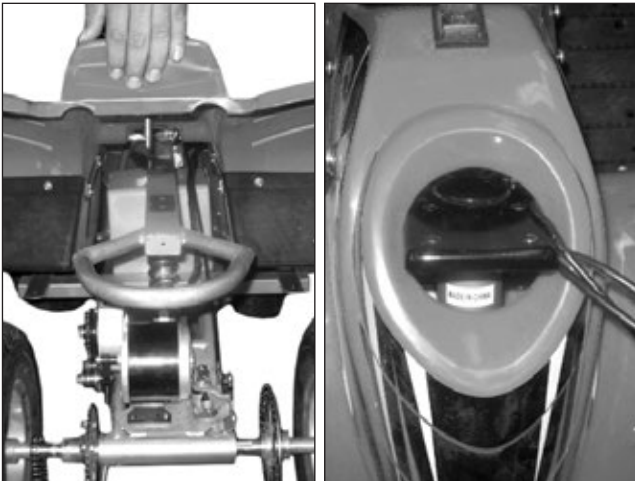


Step 6

Using a Phillips screwdriver, remove the three (3) screws on the right side (as if riding product) of the battery cover.

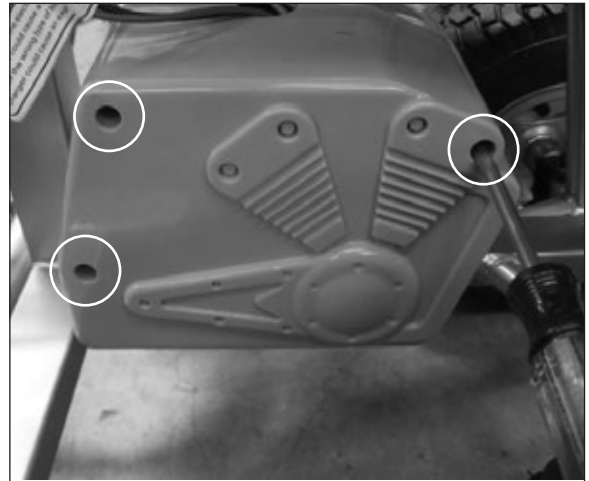


Step 7

Remove both sides of the battery covers.

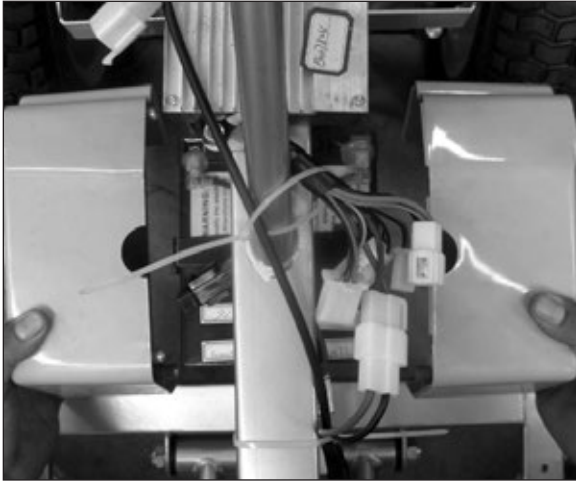

Step 8

Disconnect the connector between the battery and the control module.

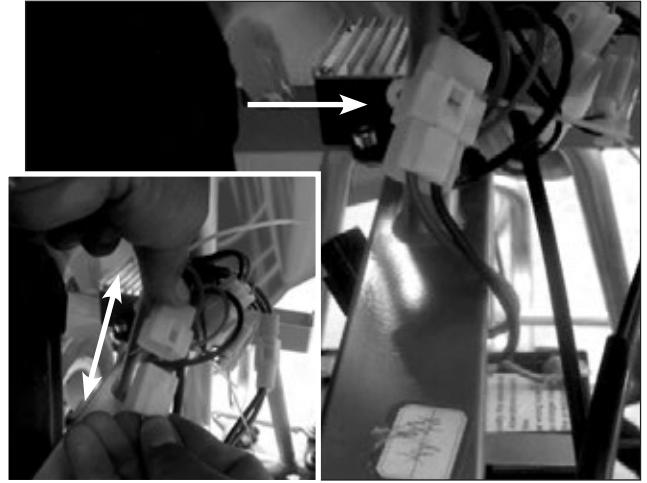

Step 9

Using a 4 mm Allen wrench, remove the two (2) bolts (1 on each side) on the battery strap.



Step 10

Use both hands to carefully lift out the batteries.



Step 11

Insert new batteries, then reverse steps 1 through 9.

ATTENTION: Charge battery 12 hours before using.