

**Required Tools: (Not included)**


- 3 mm Allen Wrench
- 5 mm Allen Wrench
- 6 mm Allen Wrench
- 10 mm Open Wrench

**⚠ WARNING**


**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Use the front carry handle to carefully lift the Dirt Quad up on its front end (unit should be standing in the upright position with rear wheels on the ground). Using a 3 mm Allen wrench, remove the two (2) bolts on the support bracket. Using the front carry handle, slowly lower the Dirt Quad back down to the ground. Save bolts for reassembly.

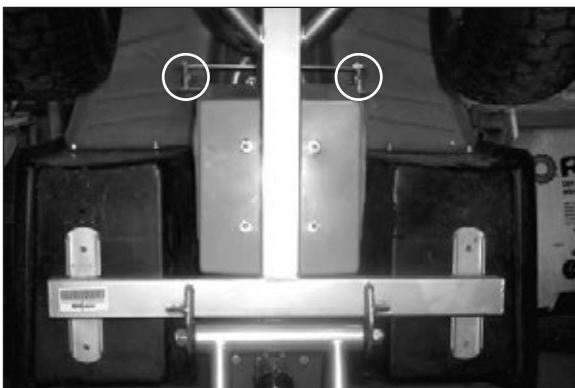**Step 2**

Using a 6 mm Allen wrench, remove the four (4) bolts on the handlebar clamps and detach handlebars.

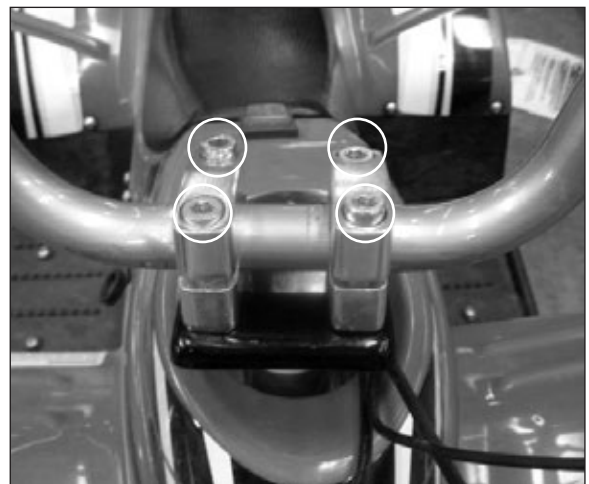


### Step 3

Using a 5 mm Allen wrench, remove the four (4) bolts on both sides of the footrest platforms.




### Step 4

Using a 10 mm open wrench, remove the two (2) lock nuts underneath the rear fender.

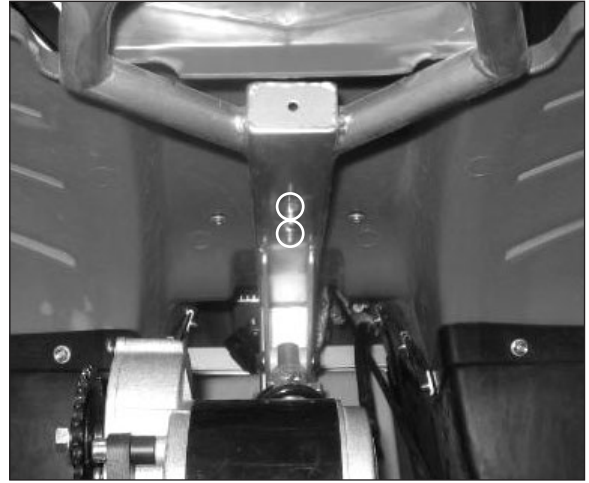


### Step 5

Lift up the plastic body and carefully maneuver it around the top of the steering tube to remove it. Set the plastic body aside.

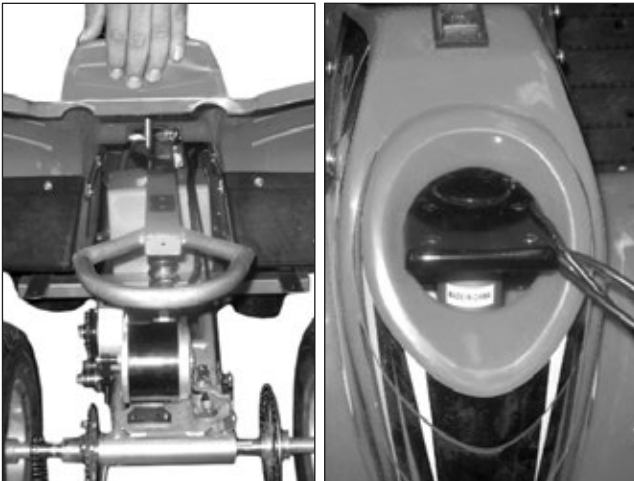


### Step 6

Carefully unplug the five (5) plastic connections attached to the controller. Each connector is a snap-lock type connection that requires depressing a small tab to allow the connector to release. Do not attempt to disconnect by pulling on the wires!

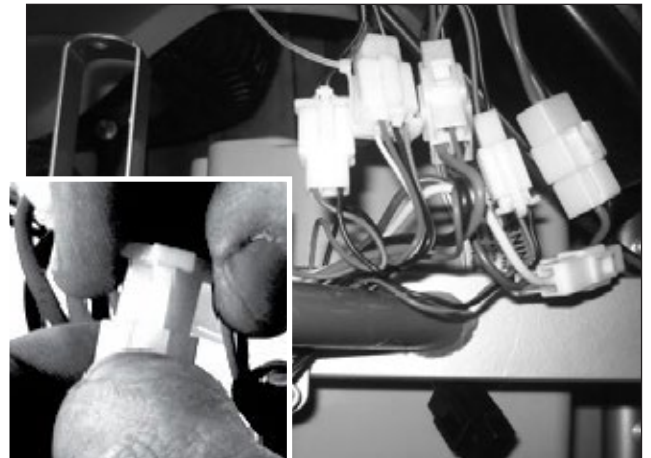

## Step 7

Using a 5 mm Allen wrench, unscrew the two (2) bolts that hold the control module in place, then remove the control module.

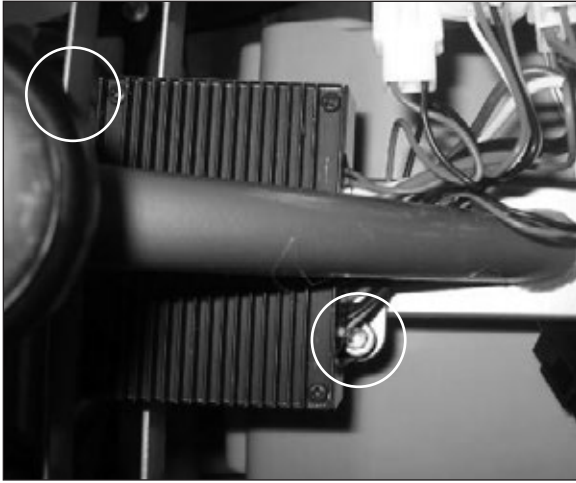

## Step 8

Insert the new control module, then reverse steps 1 through 7.

**ATTENTION: Charge battery 12 hours before using.**