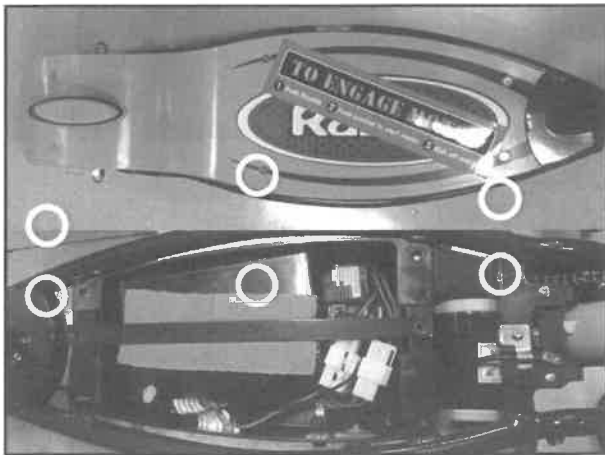
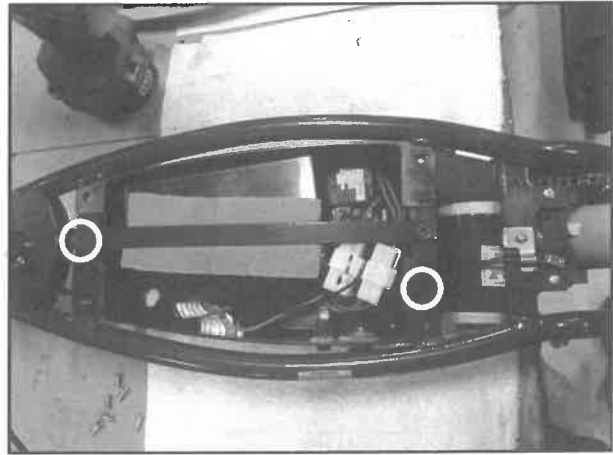


Required Tools: (Not included)**A. Phillips screwdriver
B. 3 mm Allen wrench****C. Flat head screwdriver****⚠WARNING****⚠CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before performing any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.**Step 1**

Using a Phillips screwdriver, remove the six (6) screws on the deck (circled in the image below).

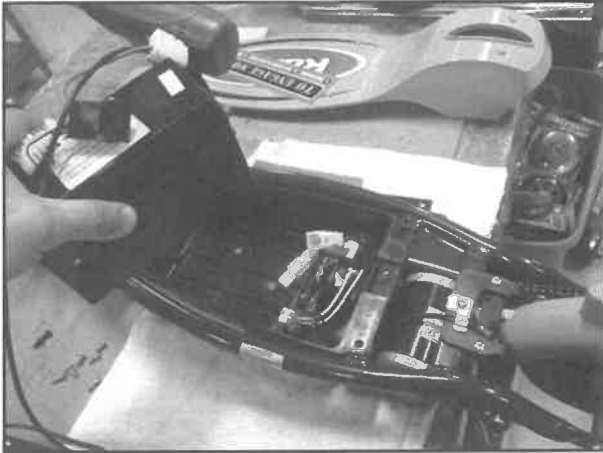
**Step 2**

Using a Phillips screwdriver, remove the two (2) screws from the battery holder (circled in the image below). Remove the deck cover and set aside.

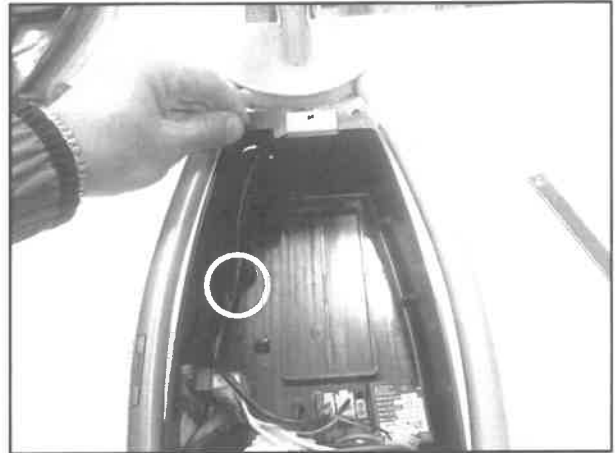


Step 3

Disconnect the battery. Remove battery from the tray to better access the throttle. Set battery aside.

**Step 4**

Using a Phillips screwdriver, remove the two (2) screws on the plastic piece that holds the throttle cable to the battery tray and remove the rubber plug which is located at the front of the battery tray.

**Step 5**

Disconnect the throttle from the control module. Follow the throttle cable and cut the zip tie. Remove the cable wrap. Gently pull the throttle cable through the hole in the battery tray.

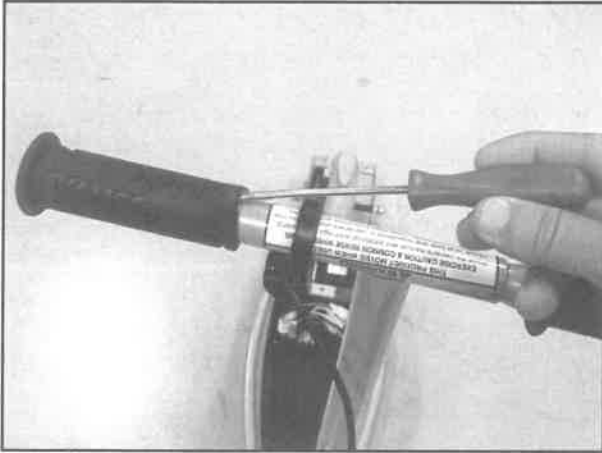
**Step 6**

Using a 3 mm Allen wrench, loosen the throttle screw but do not remove it. Move the throttle away from the grip.



Step 7

Carefully wedge a flat head screwdriver under the edge of the handlebar grip and add a small amount of lubricant or water and remove the grip. Remove the grip and set aside.

**Step 8****Reverse the procedures**

- Put the new throttle in place and secure it, clean the grip from any water or lubricant and re-install.
- Re-connect the throttle to control module.
- Place battery back inside the tray.
- Re-attach deck cover with six (6) screws.

Attention: Charge battery 12 hours before using.

