

Required Tools: (Not included)


- A. Phillips screwdriver
- B. Flathead screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the six (6) screws on the battery cover. There are three (3) on each side.

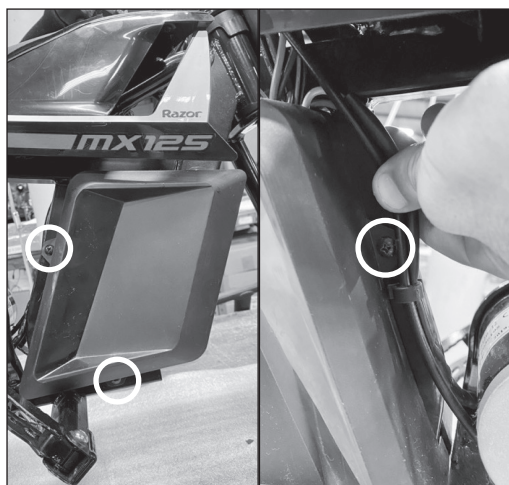**Step 2**

Remove both battery covers and set aside.




Step 3

Using a flathead screwdriver, remove the clip that holds the motor wire onto the frame. Locate and disconnect the motor from the controller.



Step 4

Using a Phillips screwdriver, remove the five (5) screws from the chain guard and set the chain guard aside.

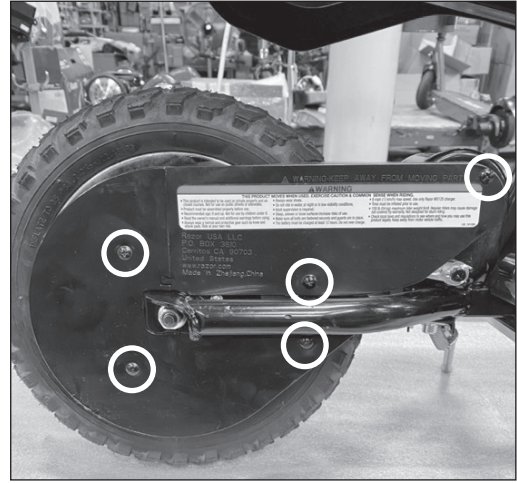


Step 5

Push down on the chain tensioner and dismount the chain from the rear sprocket.



Step 6

Using a Phillips screwdriver, remove the three (3) screws that hold the motor onto the frame. Remove the motor.

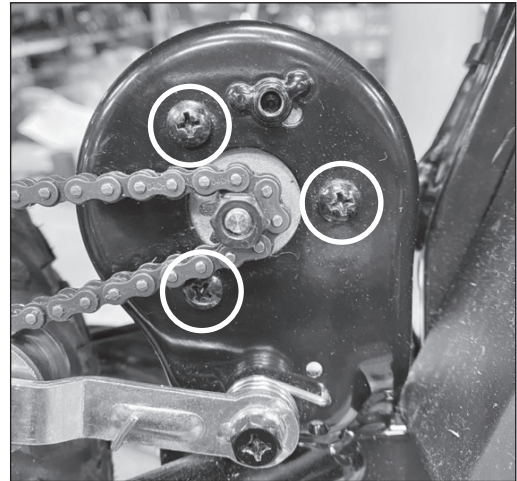

Step 7

Reverse the procedures to install the new motor.

ATTENTION: Charge battery 12 hours before using.