

**Required Tools: (Not included)**


- A. Phillips screwdriver
- B. Flathead screwdriver
- C. Cutting pliers

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove the four (4) screws that hold the seat fairing onto the frame.

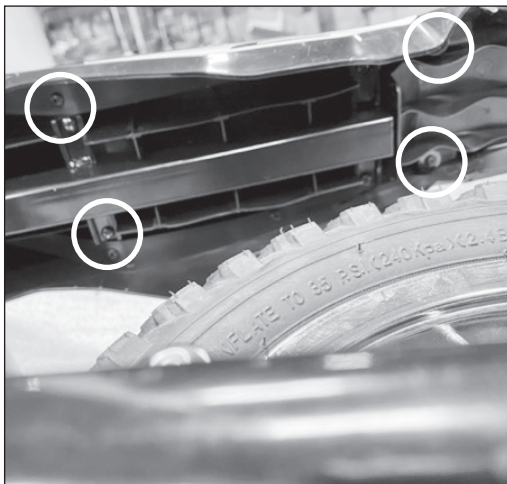**Step 2**

Lift the seat cover being careful not to pull the wires from the power switch and set seat cover aside .



### Step 3

Cut the zip tie that hold the wires onto the frame.




### Step 4

Disconnect all three (3) wires that connect to the power switch.




### Step 5

Using a flathead screwdriver, remove the plastic glue from the back of the power switch and push the switch out from the seat fairing.

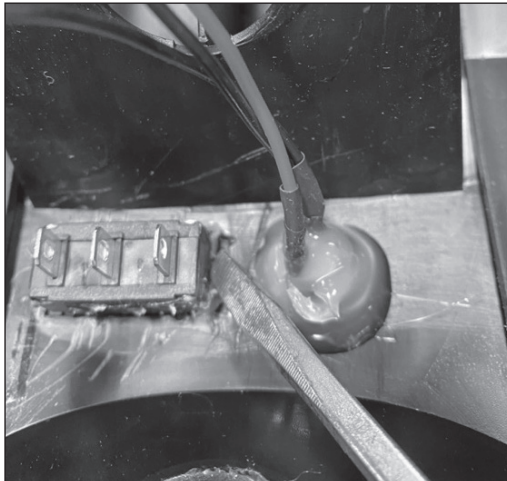

### Step 6

When reconnecting the wires onto the power switch make sure the blue wire connects to the middle prong, the black wire from the charger port connects to the gold color prong and the red wire connects to the silver color prong.

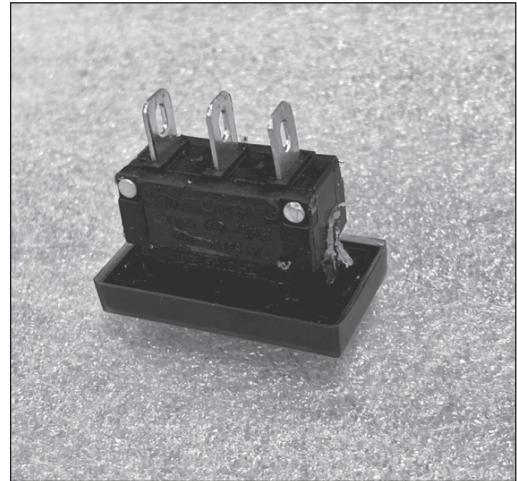

### Step 7

Reverse the steps to install the new power switch.

**ATTENTION: Charge battery 12 hours before using.**