

Required Tools: (Not included)

A. Phillips screwdriver
B. 3 mm Allen wrench

C. Flat head screwdriver

⚠WARNING

⚠CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before performing any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the six (6) screws on the battery cover. There are three (3) on each side.

**Step 2**

Remove both battery covers and set aside.

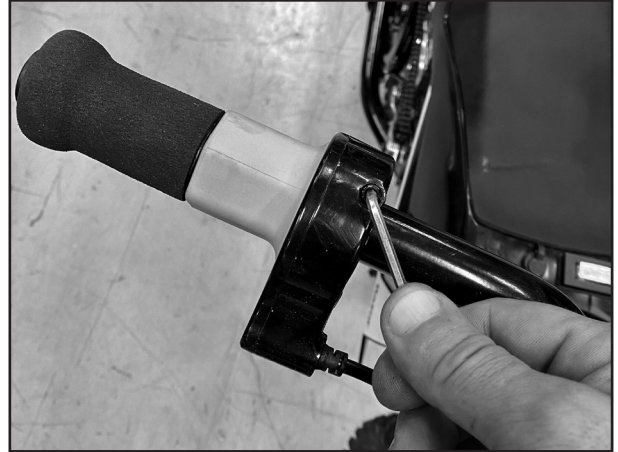


Step 3

Locate and disconnect the throttle from the control module.

**Step 4**

Using a 3 mm Allen wrench, loosen the throttle screw but do not remove it. Move the throttle away from the grip.

**Step 5**

Carefully wedge a flat head screwdriver under the edge of the handlebar grip and add a small amount of lubricant or water and remove the grip. Remove the grip and set aside.

**Step 6**

Cut the zip tie that holds the throttle wire onto the frame and remove the throttle from the unit.

**Step 7****Reverse the procedures**

- Put the new throttle in place and secure it, clean the grip from any water or lubricant and re-install.
- Re-connect the throttle to the control module.
- Re-attach the left and right battery covers with the six (6) screws.

Attention: Charge battery 12 hours before using.