POCKET MOD®
CHAIN TENSIONER
INSTALLATION INSTRUCTIONS
PART# W15130640079

Step 1

Using a Phillips screwdriver, remove the five (5) screws on the chain guard (circled in the image below). Remove the chain guard and set aside.

Step 2

Using a flat screwdriver, remove the spring from the tensioner arm (circled in the image below) and set aside.

Step 3

Using a 5 mm Allen wrench, remove the two (2) hex bolts (circled in the image below) that hold the chain tensioner onto the frame. Remove chain tensioner and discard.

Step 4

Replace the chain tensioner with the new chain tensioner.

Step 5

The chain tensioner needs to be positioned so that it is pushing upwards towards the lower side of the chain.

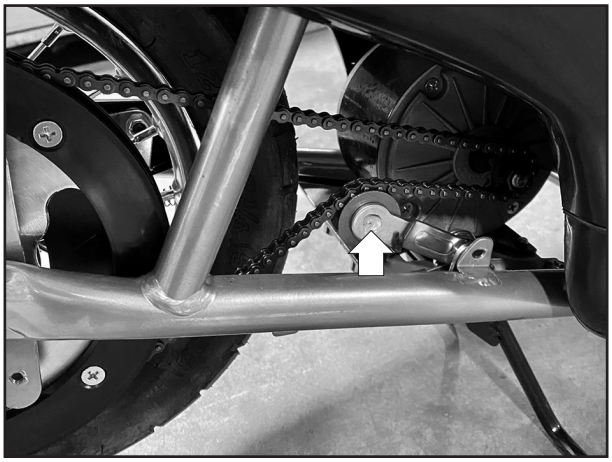

Step 6

This is a self-adjusting chain tensioner and there is no need for adjustment.

Step 7

Reverse steps 3-1 to complete chain tensioner installation.