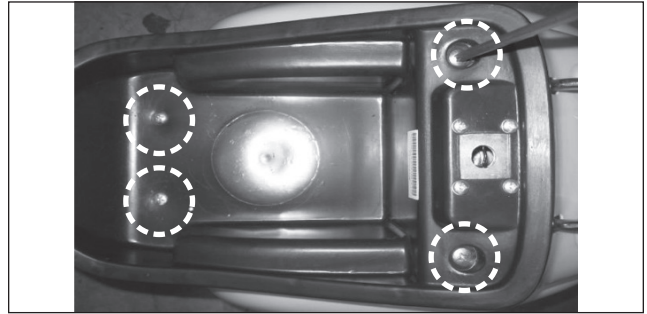


Step 1


Place the Pocket Mod on the ground and have a Phillips screwdriver ready. Make sure the power switch is in the OFF position before starting any maintenance procedure.

**Step 2**

Open the seat compartment and using a Phillips screwdriver remove the four (4) screws. The locations of the screws are circled in the image below. Remove the seat and set aside.

**Step 3**

Using a Phillips screwdriver, remove the three (3) screws from the front seat cover. The locations of the screws are circled in the image below.

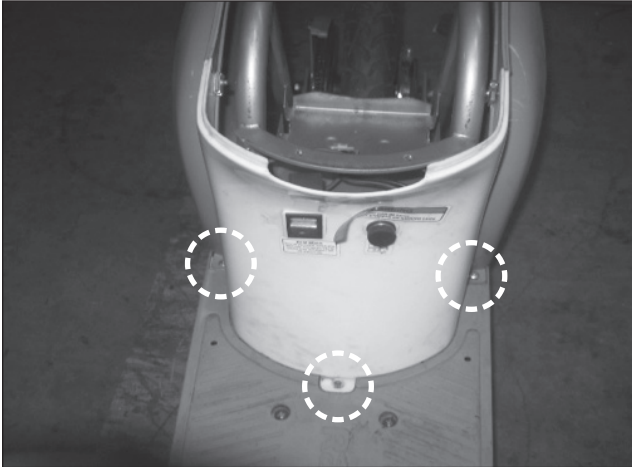**Step 4**

Locate and disconnect the battery from controller.



Step 5

Disconnect the two (2) red or yellow wires that connect to the power switch along with the rest of the connectors. Remove front seat cover and set aside.

**Step 6**

Using a Phillips screwdriver remove the two (2) screws that keep the controller attached to the frame and remove controller.

**Reverse the steps to install new controller**

(Note, when reconnecting the power switch always make sure to connect the black wire from the charger port onto the gold colored prong, red or yellow wires from controller can be connected in any sequence but only on the silver colored prongs)

Attention: Charge battery 12 hours before using