

Required Tools: (Not included)

- A. 4 mm Allen wrench
- B. Phillips screwdriver
- C. Flat screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 4 mm Allen wrench, loosen the bolt from the plastic cover next to the power switch and lift the battery cover up.

**Step 2**

Using a Phillips screwdriver, remove two (2) screws that hold the controller in place and set aside.




Step 3

Locate and disconnect the throttle from the controller.



Step 4

Flip the unit over and using a Phillips screwdriver, remove the four (4) screws that hold the cable to the frame. Remove three (3) screws from the throttle cover. Using a flat screwdriver, remove the plug to allow the cable and connector to go through the opening.

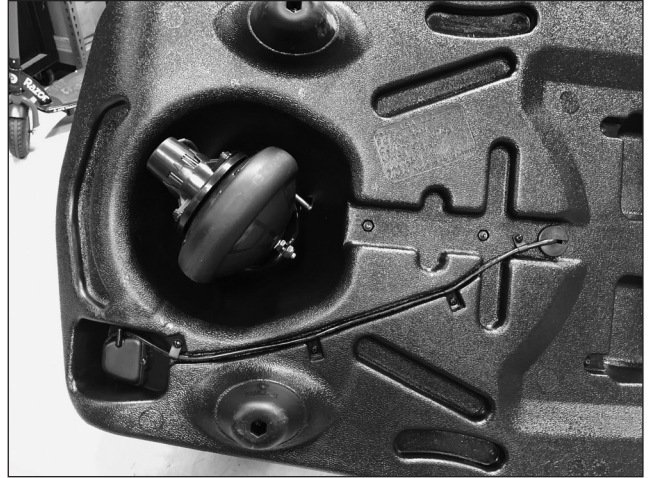

Step 5

Reverse the steps.

- Place the new Throttle back in place and secure with screws
- Re-connect the Throttle and Control Module
- Replace the controller and secure with screws
- Re-attach Battery cover with screw

ATTENTION: Charge battery 12 hours before using.