



## DIRT QUAD POWER SWITCH INSTALLATION REPLACEMENT INSTRUCTIONS


PART # W15128050101

PART # W25143065101

### Required Tools: (Not included)


- 5 mm Allen wrench
- 6 mm Allen wrench
- 10 mm wrench
- Phillips screwdriver
- Flat screwdriver

### WARNING

** CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

### Step 1

Make sure the power switch is in the "OFF" position. Use the front carry handle to carefully lift the Dirt Quad up on its end. Using a Phillips screwdriver, remove two (2) screws on the support bracket. Using the front carry handle, slowly lower the Dirt Quad back down to the ground.

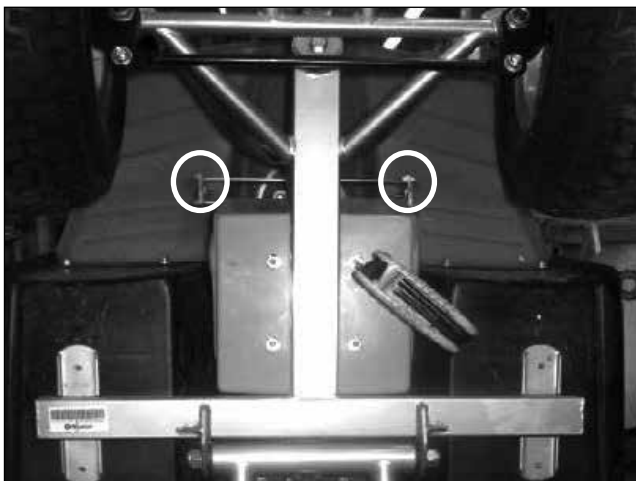


### Step 2

Using a 6 mm Allen wrench, remove the four (4) bolts on the handlebar clamps and detach handlebars.




### Step 3

Using a 5 mm Allen wrench, remove the four (4) bolts on both sides of the footrest platforms.

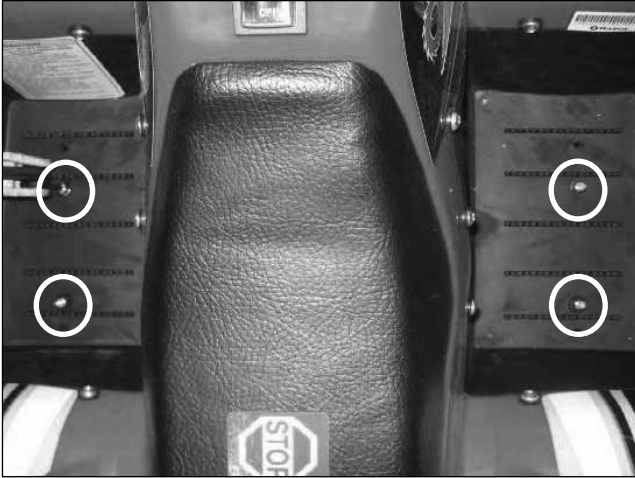


### Step 4

Using a 10 mm wrench, remove the two (2) lock nuts underneath the rear fender.

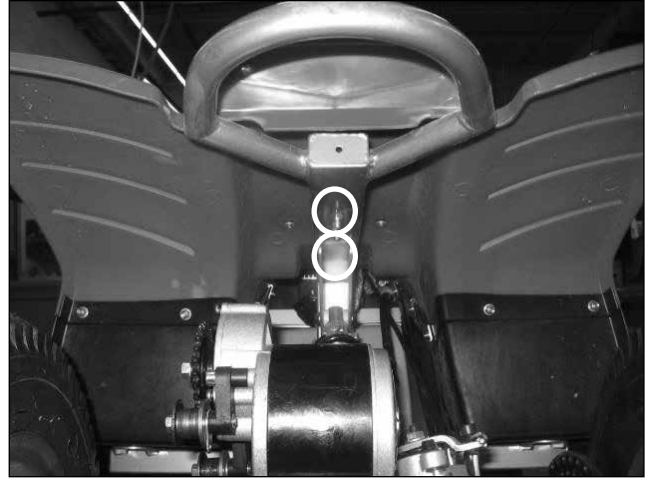


### Step 5

Lift up the plastic body. Carefully maneuver the front of the body plastic around the top of the steering tube (See inset).

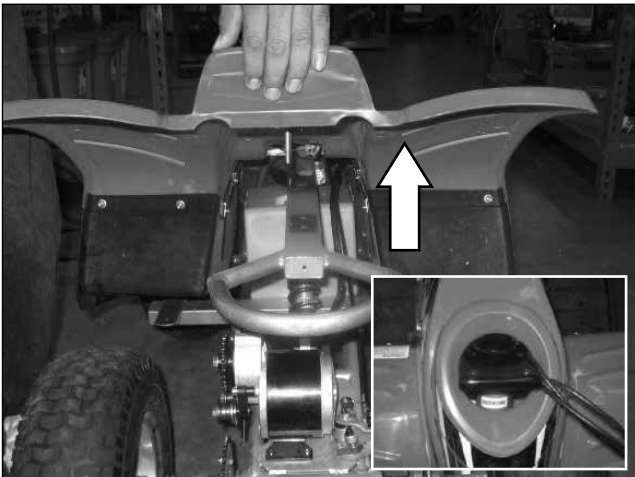


### Step 6

Disconnect the wire harness from the power switch to the controller and batteries. Disconnect the charger port connector from controller.

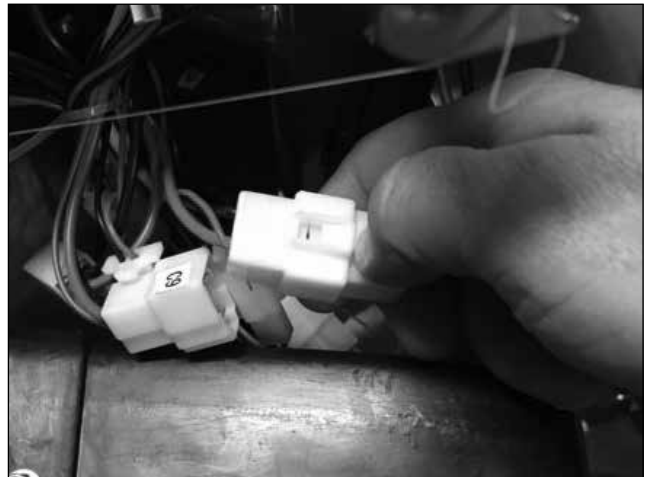


## Step 7

Remove the plastic cover from the back of the power switch. Using a flat screwdriver, remove the wires and silicone from around the power switch.

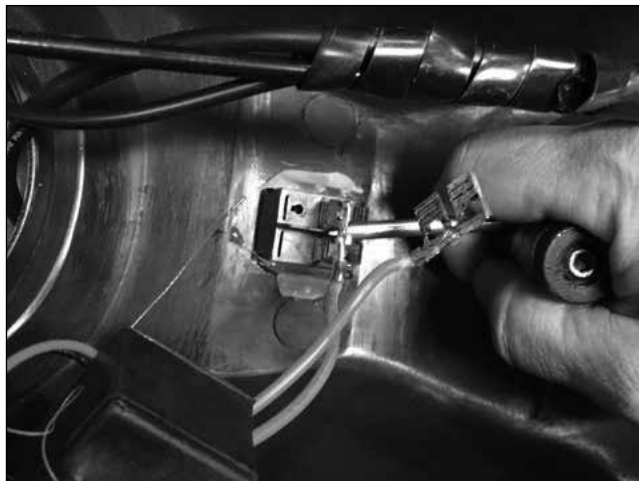

## Step 8

Depress the locking tabs from the power switch and push out switch from body fairing.

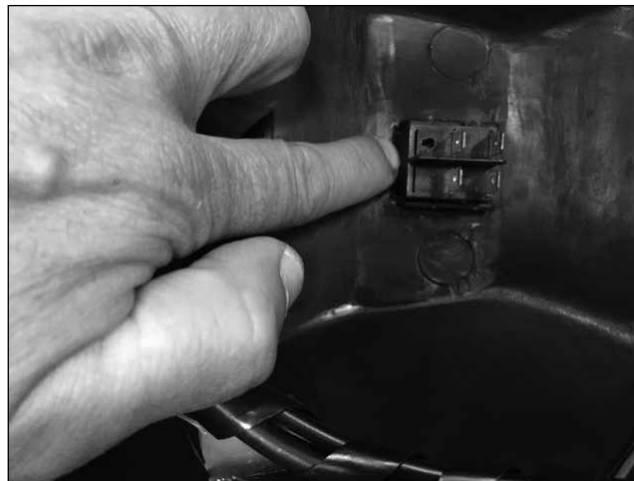

## Step 9

To install a new power switch, reverse steps 1-8.

**ATTENTION: Charge battery 12 hours before using.**