

Required Tools: (Not included)

- A. 3 mm Allen wrench
- B. Flat screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 3 mm Allen wrench, loosen the set screw from the throttle. Slide throttle away from the grip.

**Step 2**

Insert a flat screwdriver between the handle and grip. Apply a few drops of WD40® or soapy water to help remove the grip, do the same for the other side.

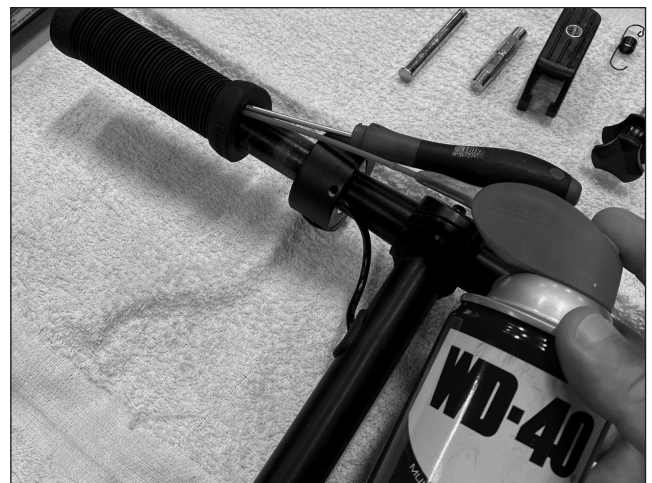

Step 3

Reverse the steps.

ATTENTION: Charge battery 8 hours before using.