

Required Tools: (Not included)


- A. Phillips screwdriver
- B. 4 mm Allen Wrench

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the two (2) screws at the back of the battery box.

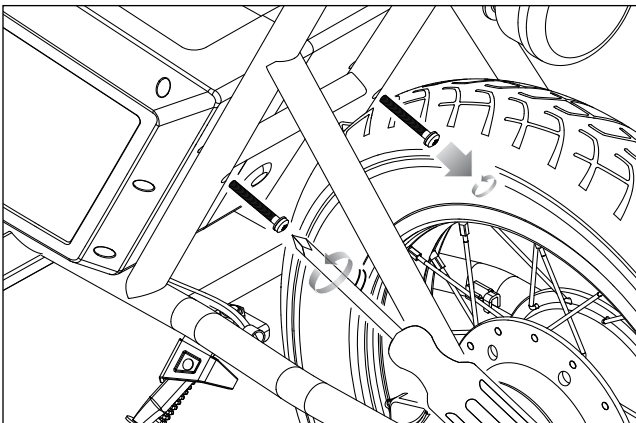
**Step 2**

Using a Phillips screwdriver, remove the two (2) screws at the front of the battery box.

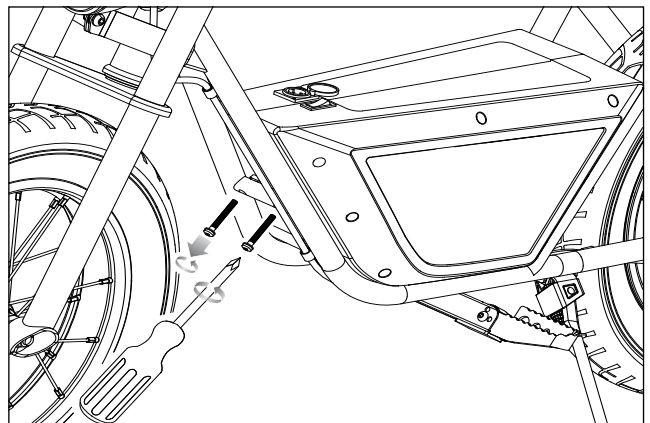


Step 3

Using a Phillips screwdriver, remove the seven (7) screws from the side of the battery box.

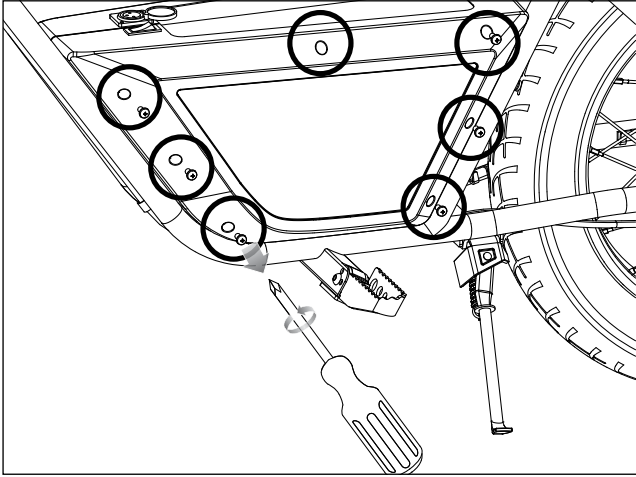


Step 4

Remove the battery box and set aside.

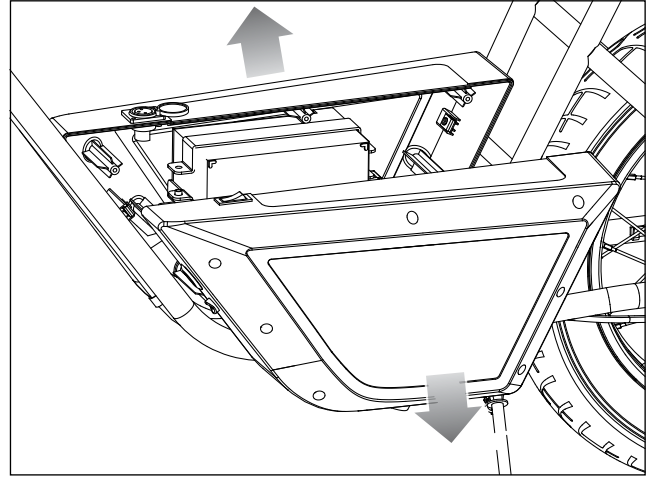


Step 5

Unplug the power cord connector.

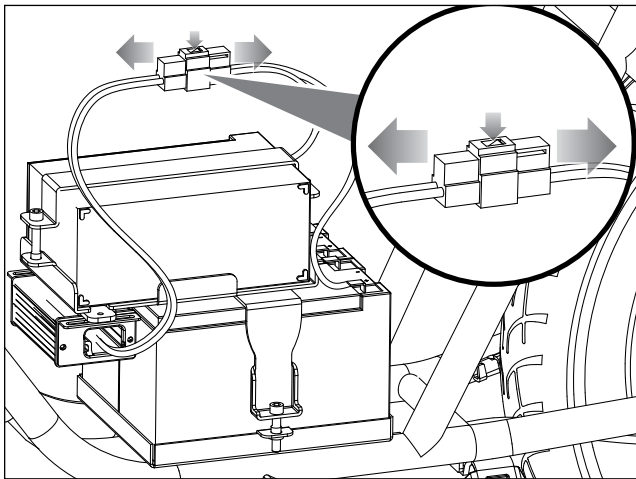


Step 6

Using a 4 mm Allen wrench, remove the two (2) screws from the top of the battery bracket (upper).

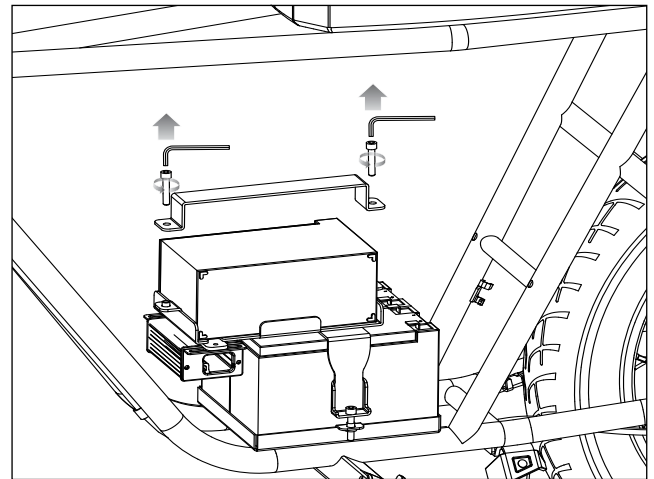


Step 7

Using a 4 mm Allen wrench, remove the two (2) screws from the sides where the battery is attached to the battery bracket (lower).

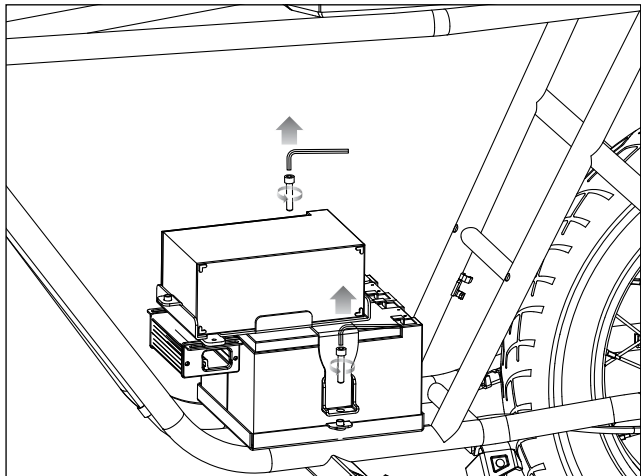


Step 8

Remove the battery bracket (lower) and battery.

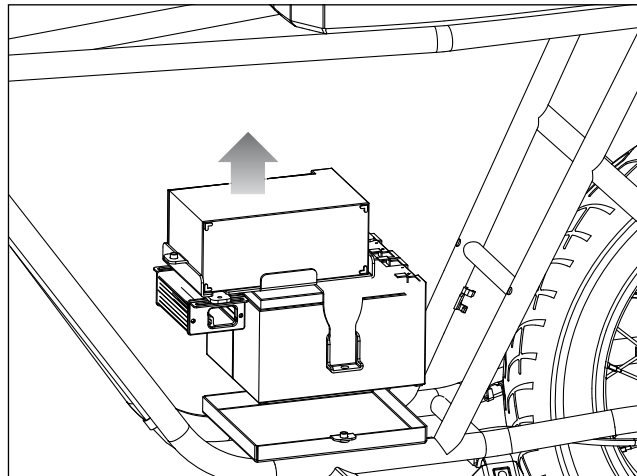


Step 9

Replace new battery.

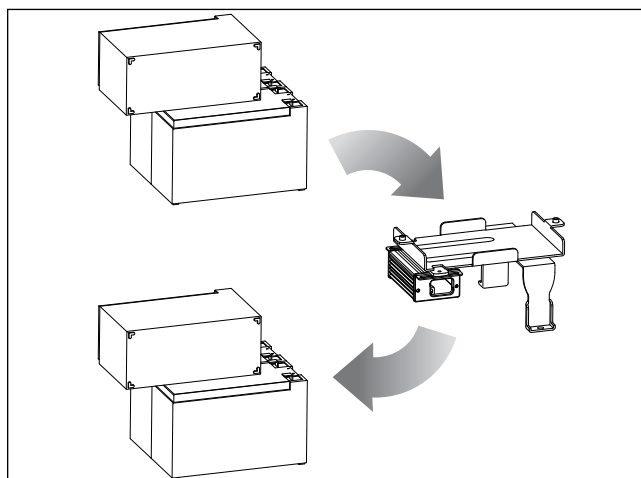


Step 10

Put the battery bracket (lower) and battery back onto the frame.

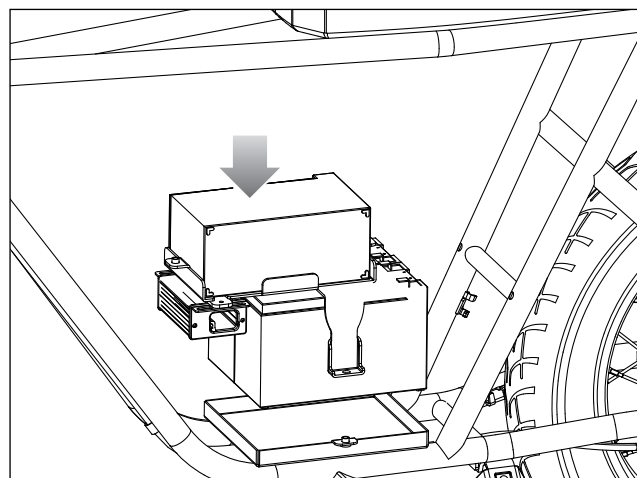


Step 11

Using a 4 mm Allen wrench, replace the two (2) screws at the sides where the battery is attached to the battery bracket (lower).

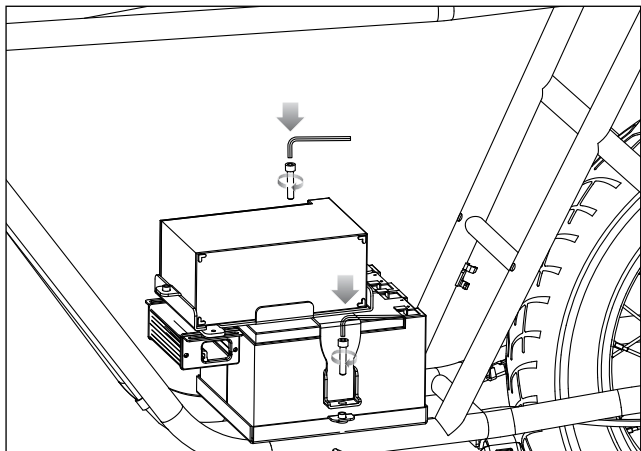

Step 12

Using a 4 mm Allen wrench, replace the two (2) screws at the top of the battery bracket (upper).

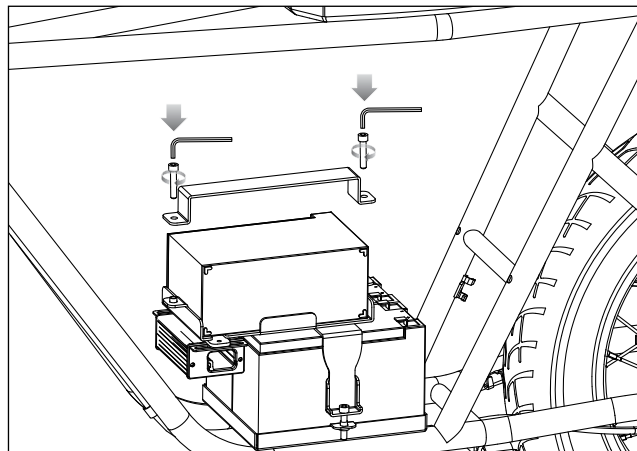

Step 13

Reverse the steps.

ATTENTION: Charge battery 12 hours before using.