

**Required Tools: (Not included)**


- A. Phillips screwdriver
- B. 3 mm Allen wrench
- C. Flat screwdriver

**⚠ WARNING**


**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove seven (7) screws from the side of the battery cover with the power switch.

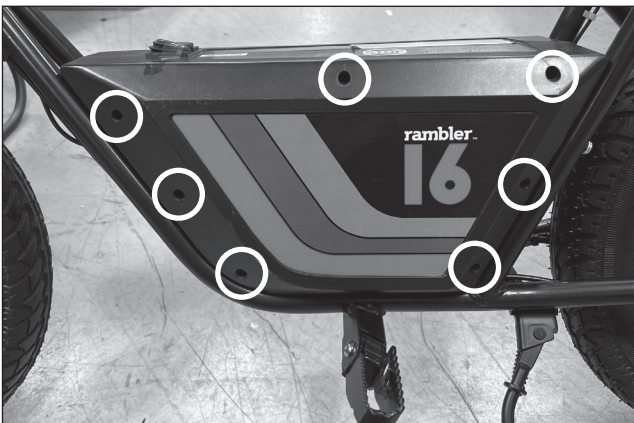**Step 2**

Remove four (4) screws, two (2) at the front and two (2) at the back of the battery cover. Pull the cover out. Be careful not to damage the wires.

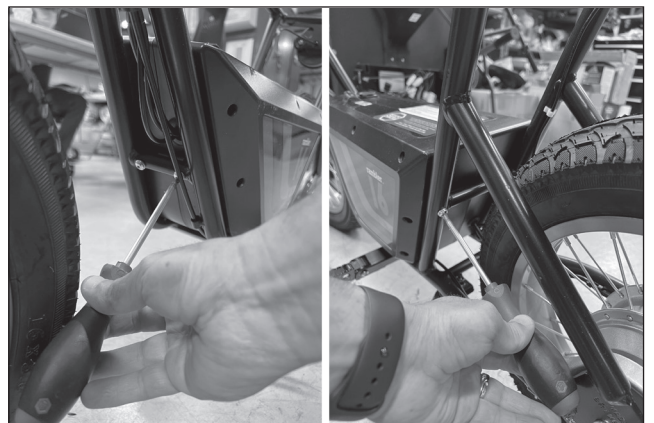

### Step 3

Locate and disconnect the throttle from the controller.



### Step 4

Using a 3 mm Allen wrench, loosen the set screw from the throttle and move the throttle away from the grip.



### Step 5

Using a flat screwdriver, insert the blade of the screwdriver in between the grip and the handlebar. Add a few drops of lubricant or soapy water. Remove grip and throttle.



### Step 6

Reverse the steps.

**ATTENTION: Charge battery 12 hours before using.**