

**Required Tools: (Not included)**


- A. Phillips screwdriver
- B. 3 mm Allen wrench
- C. 8 mm wrench

**⚠ WARNING**


**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove seven (7) screws from the side of the battery cover with the power switch.

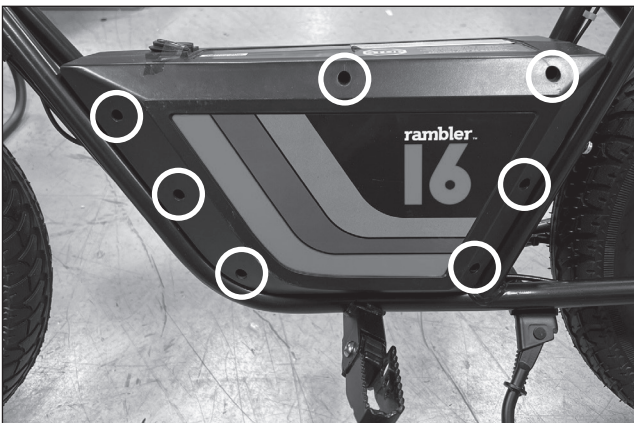
**Step 2**

Remove four (4) screws, two (2) at the front and two (2) at the back of the battery cover. Pull the cover out. Be careful not to damage the wires.

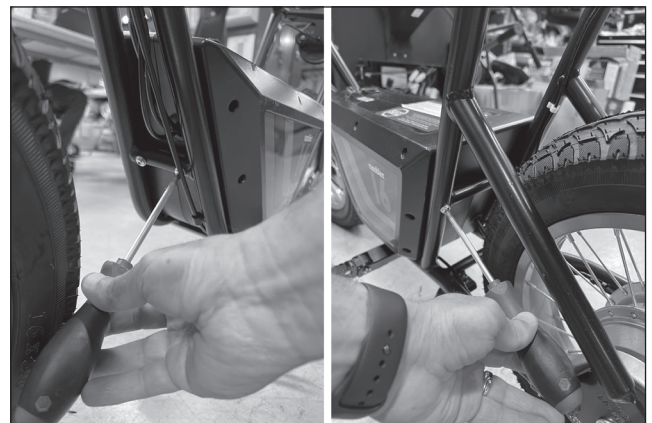

### Step 3

Locate and disconnect the headlight from the controller.

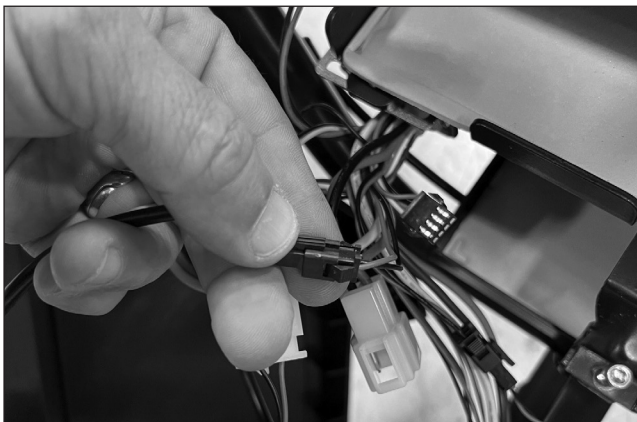

### Step 4

Using a 3 mm Allen wrench and a 8 mm wrench, remove the bolt and lock nut that hold the headlight onto the holder and remove it.



### Step 5

Reverse the steps.

**ATTENTION: Charge battery 12 hours before using.**