

Required Tools: (Not included)


- A. Phillips screwdriver
- B. Flat screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the five (5) screws from the side with the power switch.

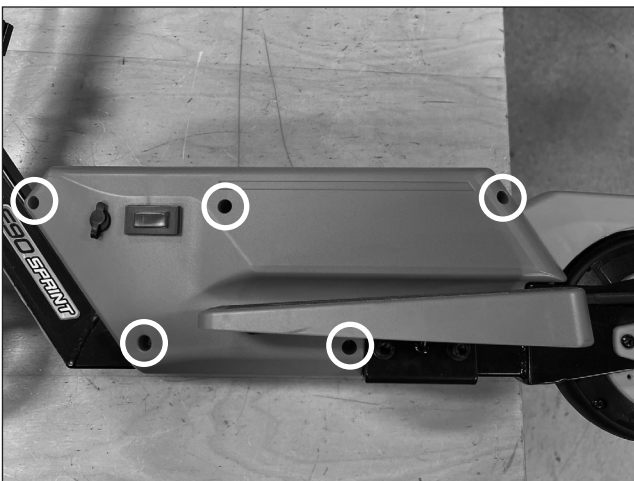
**Step 2**

Pull the cover off. Be careful not to damage the wires for the charger port and power switch. Set cover aside.




Step 3

Disconnect all three (3) wires on the back of the power switch. Remember the position of the wires, black wire from charger port connects to gold colored prong, blue wire connects to middle prong and red wire connects to side silver prong.

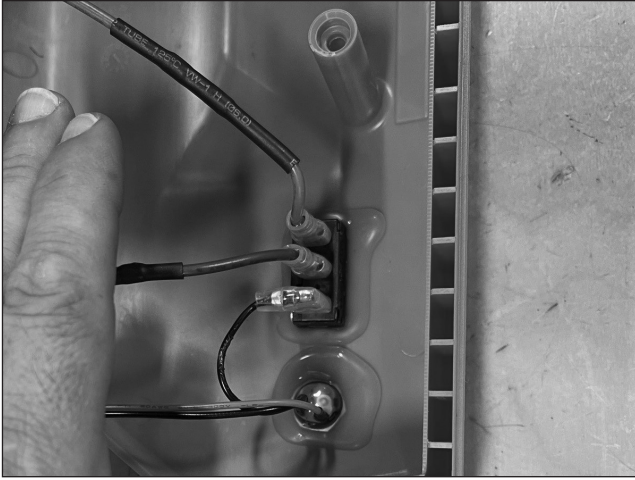

Step 4

Using a flat screwdriver, remove the glue on the back of the power switch and push the switch out from the battery cover.

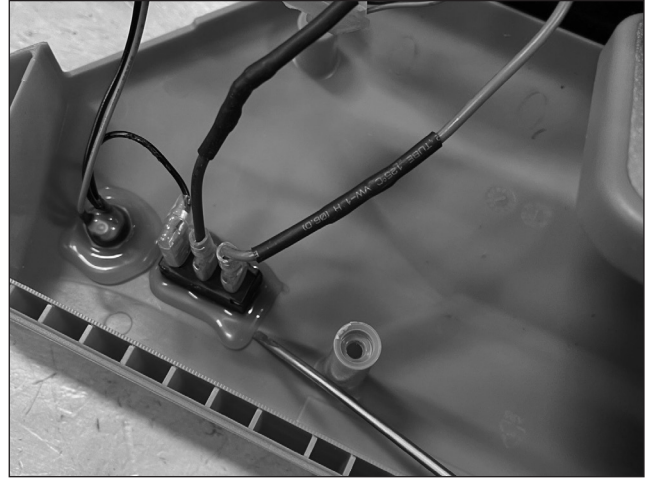

Step 5

Reverse the steps.

ATTENTION: Charge battery 12 hours before using.