

Tools Required: (Not included)

- A. Phillips head screwdriver
- B. 10mm open wrench

Step 1

Using a Philips screw driver remove the 2 screws on the frame next to the axle bolt.

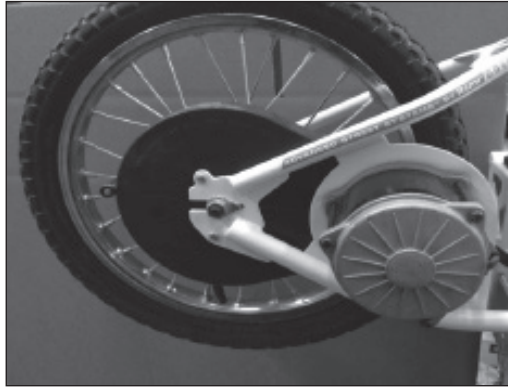


Figure 1

Step 2

Remove one more phillip screw located behind the motor mount plate.

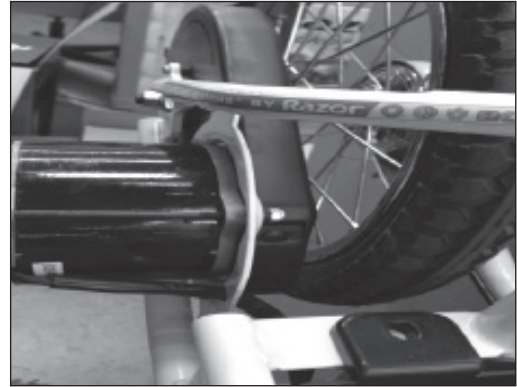


Figure 2

Step 3

Using a size 10mm open wrench loosen up the nut that holds the tensioner onto the frame and remove it.



Figure 3

Step 4

replace the chain tensioner with the new one.



Figure 4

Step 5

Reverse the procedures

Place the chain guard back and secure it with screws.