

Required Tools: (Not included)

- 4 mm Allen wrench
- Phillips screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 4 mm Allen wrench, loosen and remove the four (4) hex bolts that hold the battery cover. Place your finger under the bolt to prevent the lock nut from falling out of place. Save bolts and lock nuts for re-installation.




Step 2

Lift and remove the battery cover being careful not to pull the wires from the power switch and charger port. Locate and disconnect the throttle from the controller.




Step 3

Turn the unit on its side. Using a Phillips screwdriver, remove the six (6) screws that hold the throttle cable onto the frame.

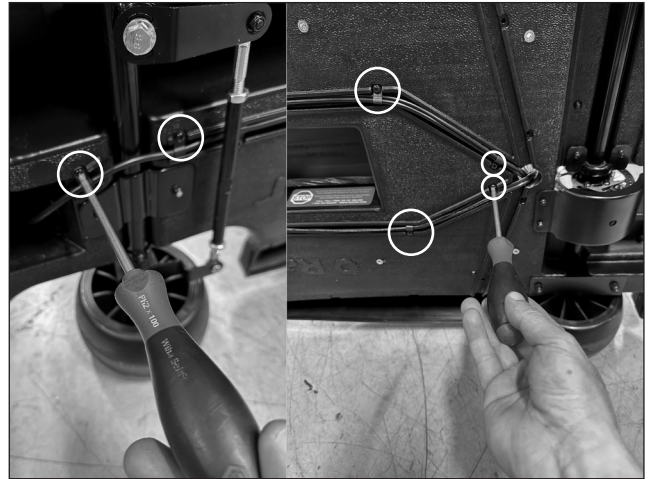

Step 4

Using a Phillips screwdriver, remove the three (3) screws at the back of the throttle and remove it from the frame.

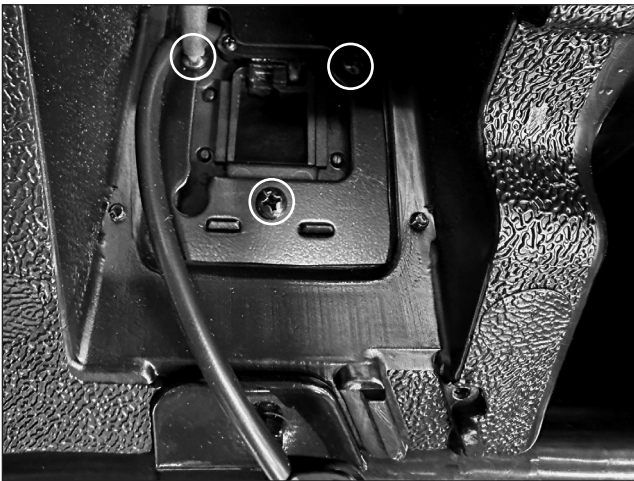

Step 5

Reverse the steps to install the new throttle.

ATTENTION: Charge battery 12 hours before using.