

Required Tools: (Not included)


- A. 4 mm Allen Wrench
- B. 5 mm Allen Wrench
- C. Phillips Screwdriver
- D. Needle Nose Pliers

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 4 mm Allen wrench, remove the four (4) bolts that secure the handlebar to the stem and pull the handlebar out from the stem.

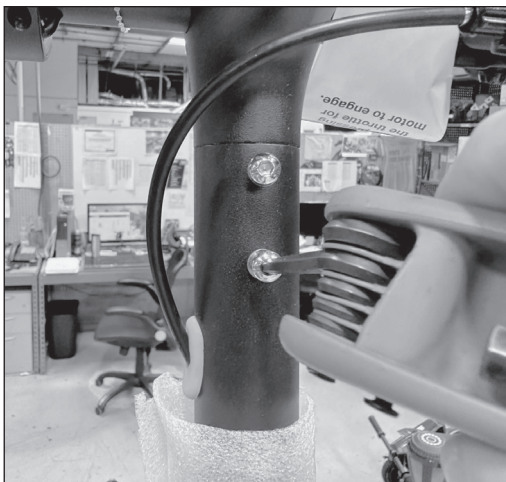
**Step 2**

Locate and disconnect the handlebar kit from the main line.




Step 3

Using needle nose pliers, remove the end cap at the back of the brake cable.

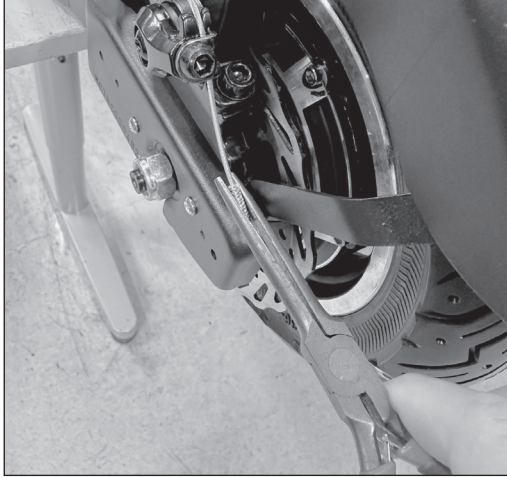


Step 4

Using a 5mm Allen wrench, loosen the bolt that holds the brake cable onto the caliper.

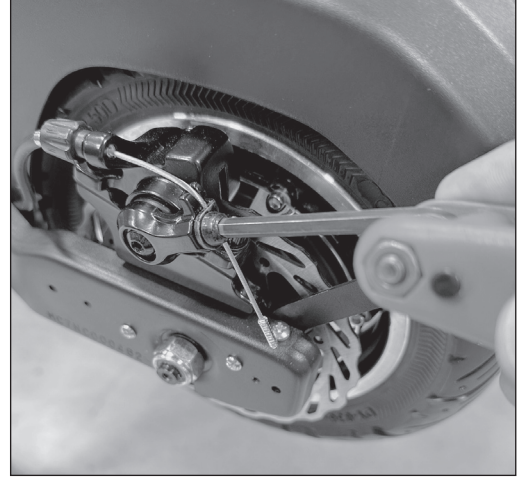

Step 5

Using a Phillips screwdriver, remove six (6) screws from the deck. Remove the deck and the brake cable from the unit.

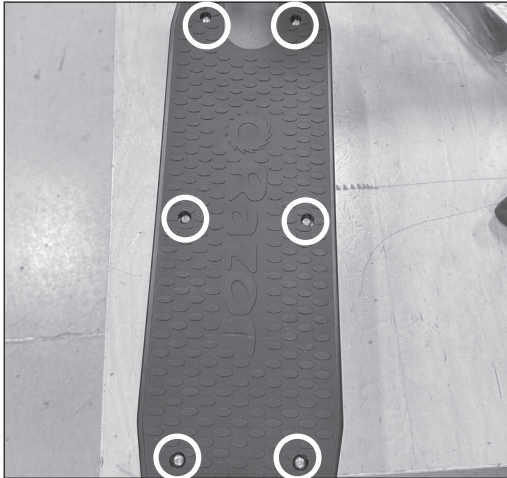

Step 6

Reverse the steps to install the new handlebar kit.

ATTENTION: Charge battery 6 hours before using.