



# CRAZY CART FRONT STABILIZING POSTS INSTALLATION INSTRUCTIONS

W25143499204

**Tools Required:** 5 mm Allen wrench (Not included)

## ⚠WARNING

To avoid potential shock or other injury, turn power switch OFF and disconnect charger before removing or installing the front stabilizing posts.

## Note

You spoke and we listened! In response to the feedback we've received on our 2013 Crazy Cart, Razor has changed the Cart's design, replacing the small stabilizing casters in the front of the 2013 version with a new, more durable, stabilizing post.


As with the small stabilizing "casters" used in 2013, the purpose of these new stabilizing "posts" is to help keep your Crazy Cart from tipping over when you are first stepping onto the Cart and when you turn too hard. In either of these cases, as the Cart starts to tip, one of the stabilizing posts touches the ground and helps limit the tipping.

These new stabilizing posts have been designed to last, and not bend or break as some of the small stabilizing casters used on the 2013 version did. Though one set of these new stabilizing posts will last most users for the life of their Cart, we've made the ends easily replaceable.

## Replace both original stabilizing casters with new stabilizing posts


### Step 1

Carefully turn unit over and loosen the four (4) 5mm hex bolts that attach the front caster/stabilizing post to the frame; remove caster/post

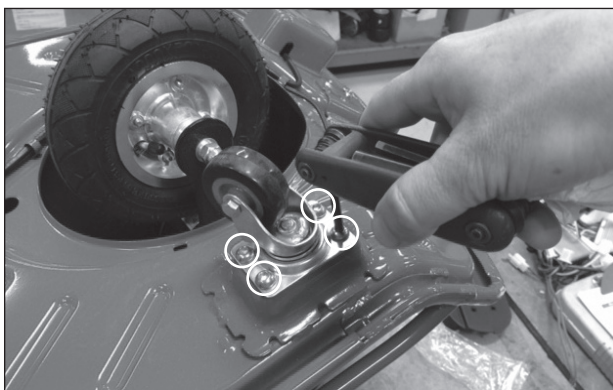

### Step 2


The stabilizing post is slightly angled to one side. Position the post so it is leaning towards the outer side of the frame.

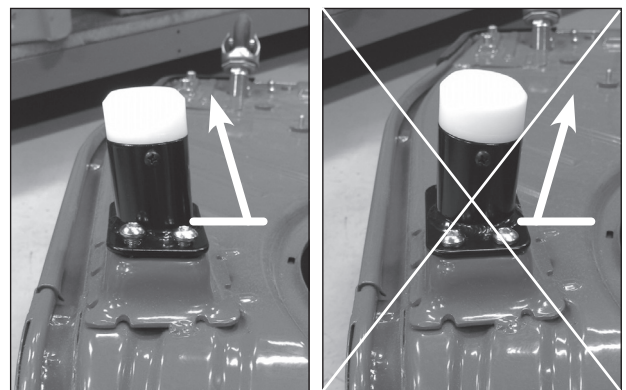

**Need Help?** Visit our web site at [www.razor.com](http://www.razor.com) or call toll-free at **866-467-2967** Monday - Friday 8:00 AM - 5:00 PM PST.


### Step 3

Align the four (4) holes on the stabilizing post with the four (4) holes on the frame

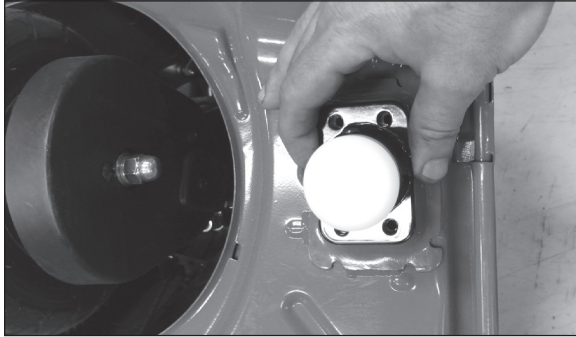


### Step 4

Re-insert all four (4) hex bolts into the base of the stabilizing post before tightening to keep post properly aligned with the frame.

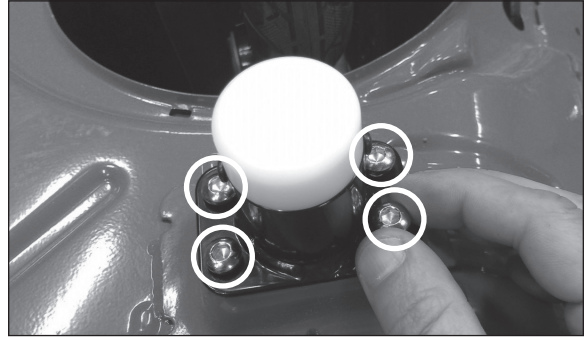


### Step 5

Using a 5mm Allen wrench, tighten the four (4) hex bolts until stabilizing post is securely in place.

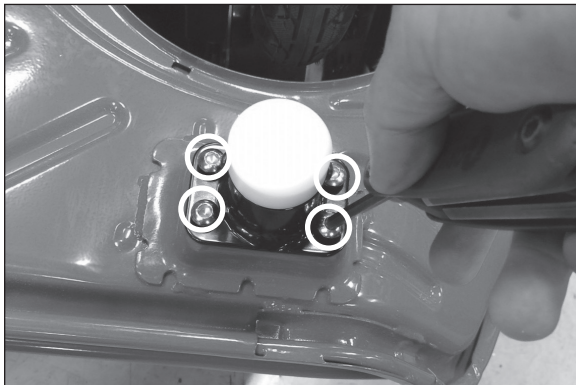

### Note

Please note the wear limit line indicated on the white portion of the stabilizing post, directly above the screw. When you have reached this line; it's time to replace the tip.

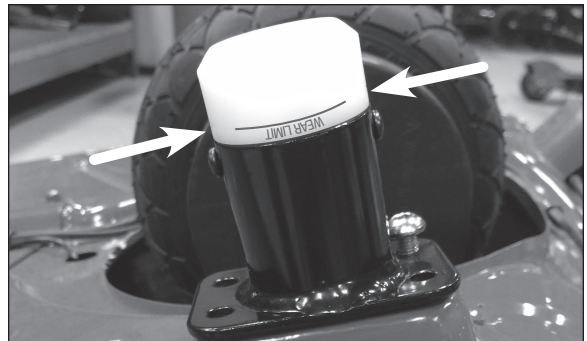

For more information and videos of the Crazy Cart, check out **Crazy Cart TV** on Youtube.com at:

[www.youtube.com/user/crazycarttv](http://www.youtube.com/user/crazycarttv)

Search for "Crazy Cart Ride Guide" on Youtube.com