

**Attention: Charge battery 12 hours before using**

### Step 1

Using a Phillips screwdriver, remove the seven (7) screws from the battery cover from the throttle side.




### Step 2

Locate and disconnect the connector from the throttle to the controller.



### Step 3

Flip the unit on its side and unthread the throttle cable from the unit.

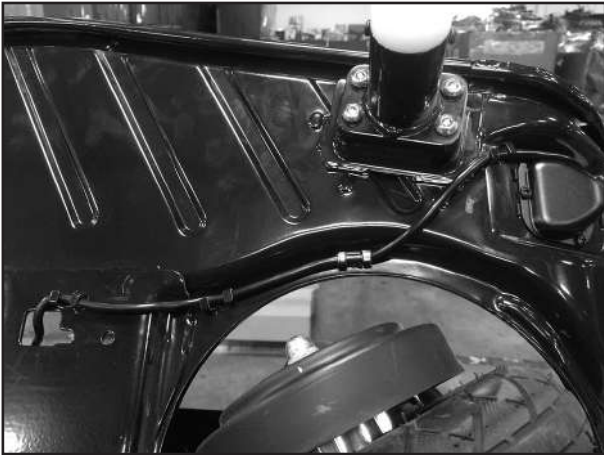

### Step 4

Using a Phillips screwdriver, remove the three (3) screws that hold the throttle onto the frame of the unit. Place the new foot pedal throttle in place.




**Step 5**

Using a Phillips screwdriver, install the three (3) screws that hold the throttle onto the frame of the unit.

**Step 6**

Flip the unit back to the upright position.

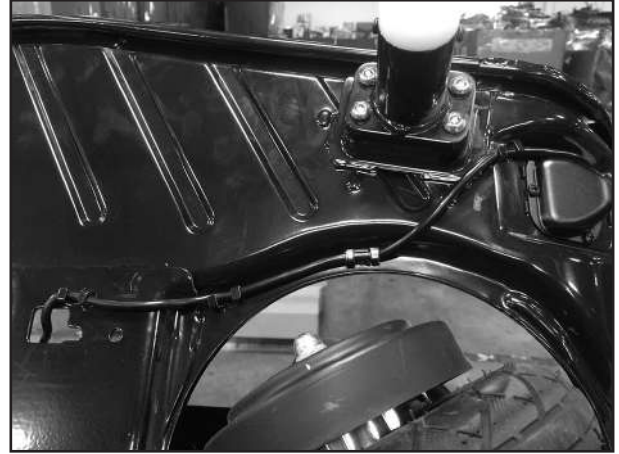**Step 7**

Locate and connect the connector to the throttle to the controller.

**Step 8**

Using a Phillips screwdriver, install the seven (7) screws from the battery cover from the throttle side.

