

**Required Tools: (Not included)**

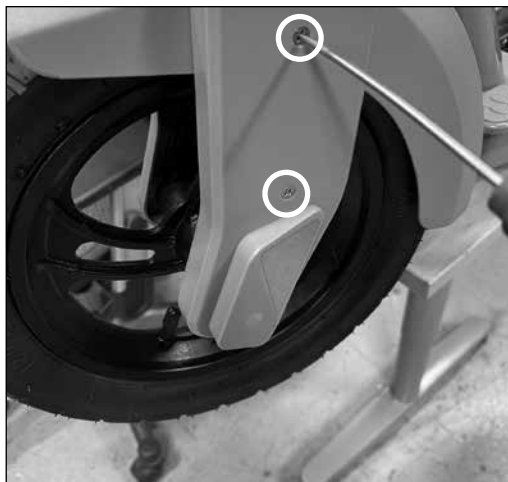
- A. Phillips screwdriver
- B. Two (2) 18 mm wrenches

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove four (4) screws from the front fork covers. Remove front fork covers and set aside.

**Step 2**

Using two (2) 18 mm wrenches loosen the lock nuts from the axle and slide the wheel down.



### Step 3

Reverse the steps.

- Reposition the front fork covers and attach with the screws that were removed in Step 1.

**ATTENTION: Charge battery 8 hours before using.**