

Tools Required: (Not included)

- A. Phillips head screwdriver
- B. Flat head screwdriver
- C. 5mm Allen wrench
- D. 6mm Allen wrench
- E. 4mm open wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before removing or installing the batteries. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Remove the 4 phillip screws at the back of the battery cover of your unit



Figure 1

Step 2

Remove two 4mm hex screws on the right side of the battery tray

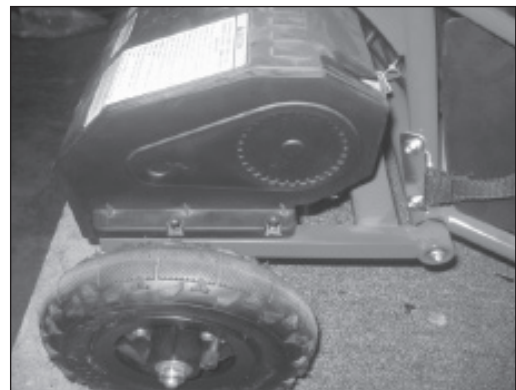


Figure 2

Step 3

Remove two 4mm hex screws on the left side of the battery cover and 1 phillip screw located in the middle left side of the battery cover and remove the cover away from the unit carefully not to pull the wires connected to the power switch or charger port.

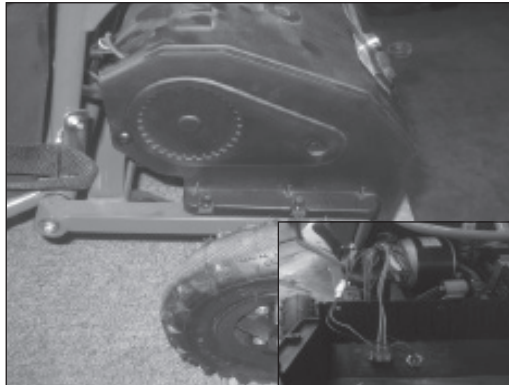


Figure 3

Step 4

Flip the unit on the side to get access to the bottom part of the motor cover, Using a Phillips screw driver remove the screw located on the side and using a 5mm Allen wrench remove the 3 hex bolts that hold it onto the frame and remove.

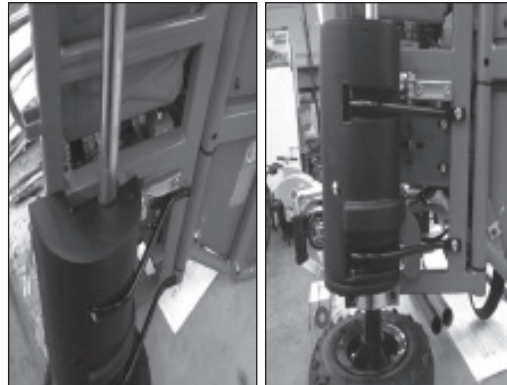


Figure 4

Step 5

(Removing the chain that connects the motor to the larger sprocket) Using a 5mm Allen wrench remove the 4 hex bolts that hold the motor to the frame and remove the chain.

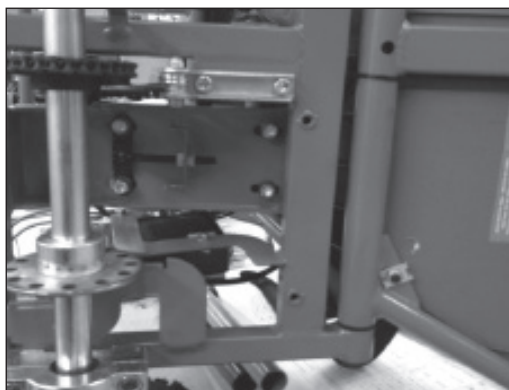


Figure 5

Step 6

(Removing the chain that connects the axle sprocket to the small sprocket) Using a flat screw driver remove the spring from the chain tensioner arm to release the tension on the chain and using a 6mm Allen wrench remove the 4 hex bolts that hold the axle onto the frame and remove the chain.

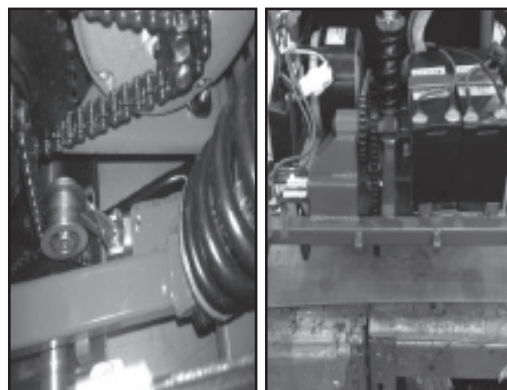


Figure 6

Step 7

Reverse the procedures to install.

ATTENTION: Charge battery 12 hours before using